

MINITRACTOR VERSIONS

ENGINE LOMBARDINI	TRACTION HYDROSTATICS WITH REDUCERS			THIRD HYDRAULIC POINT CONNECTION	N° OF FILES APPLICABLE
18 HP - 2 CIL	4x4	ø760x180	90-130	INDOOR 1 = 550 Kg EXTERNAL 2 = 150 Kg	1 FILE
27 HP - 3 CIL	4x4	ø760x180	130-220	INDOOR 1 = 550 Kg EXTERNAL 2 = 150 Kg	2 FILES
40 HP - 4 CIL	4x4	ø760x180	130-220	INDOOR 1 = 550 Kg EXTERNAL 2 = 150 Kg	3/4 FILES

APPLICATION RANGE AND POSSIBLE COMBINATIONS

Rotoblizz

N.B. On all crops with distance between the rows equal to or greater than 30 cm.

	ø cm	(L) cm	ø26 (L) from 35 / 35	ø30 (L) from 35	ø35 (L) from 40	ø40 (L) from 50	ø45 (L) from 60	ø50 (L) from 100
--	------	--------	----------------------	-----------------	-----------------	-----------------	-----------------	------------------

Rotoverit

N.B. On all crops with distance between the rows from 15 to 35 cm.

	ø cm	(L) cm	ø40	(L) FROM 15 TO 35
--	------	--------	-----	-------------------

Colibri

N.B. Work on all crops in narrow rows with distance between the rows spacing of 8 to 35 cm.

	(L1) cm	(L) cm	(L1) cm	(L1) DA 8 A 35
--	---------	--------	---------	----------------

OPTIONAL

<p>Camera on the row</p>	<p>Crust breaker of tractor's wheel</p>	<p>Hydraulic socket services</p>	<p>Ridger disk</p>
<p>Protection plants</p>	<p>Irrigation hose lifter</p>	<p>Fertilizer distributor</p>	
<p>Cleaner disc on Rotoblizz</p>	<p>Wire stone stopper on Rotoblizz</p>	<p>Pre-breaking star</p>	<p>Ploughshare flatten the soil removes stones</p>

New 2019 !!!

Guidance system with automatic control of the rows



ELFURBO MINITRACTOR



OLIVER
AGRO

OLIVER AGRO S.R.L.
Via Torre, 350 - 37056
ENGAZZA' DI SALIZZOLE (VERONA) - ITALY
Tel. +39 045 6954392 - Fax. +39 045 6954408
info@dittaoliver.com - www.oliveragro.com




ELFURBO minitractor self-propelled and multi-purpose tool-holder, designed to perform the weeding inside of the rows with maximum practicality and with the help of a single operator.

MINITRACTOR APPLICATIONS


ELFURBO supports the **Rotoblizz / Rotovert / Colibrì**, applications, which act directly on the transplant row without damaging the root and leaf apparatus, eradicating weeds, thus reducing the need for chemical herbicides.

TECHNICAL DATA

COMPACTNESS

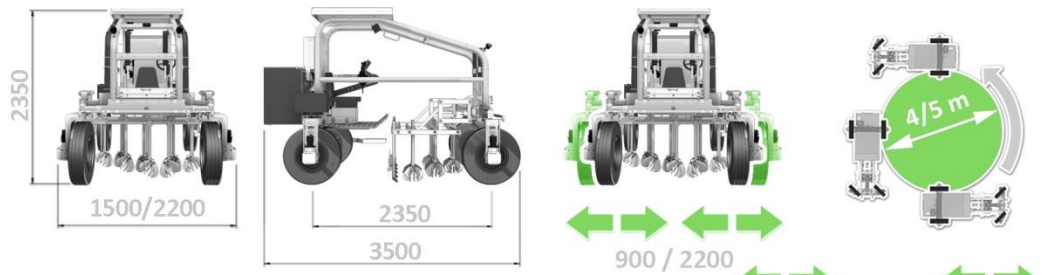

COMFORT

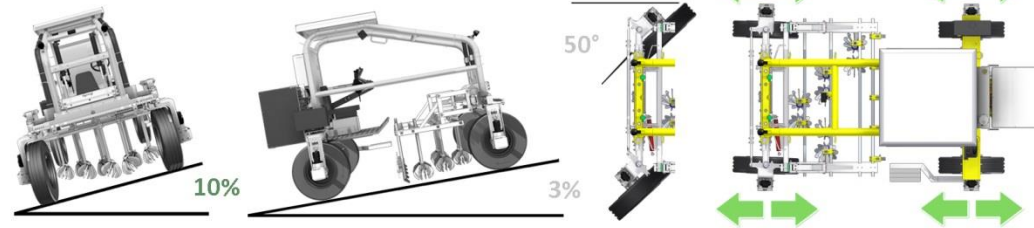

VISIBILITY

hydraulic guide

Cloche commands

Traction on the 4 wheels


SAVINGS OF TIME AND COST OF STAFF



kg
empty 900 kg
with accessories 1500/1600 kg

8 / 18 Km/h

APPLICATION RANGE

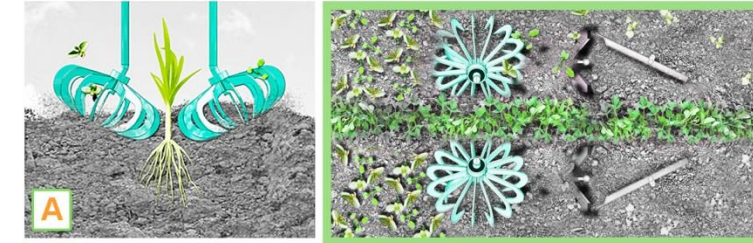

Suitable for: all crops transplanted and seeded in line and on ridge



Indicated for: for some transplanted and seeded crops in line e on top (salad, celery, leek, onions, carrots, radicchio).



Suitable for: carrots, radishes, parsley, sown rice, basil etc.

BASIC ACCESSORIES FOR APPLICATIONS

1 Parallelogramma

Element for single row

- Fixed load. Leaf springs.
- Variable load Springs with adjustable load

2 Structure supports elements

- Flexible structure
- One single register key
- Fully adjustable
- Supports basic and optional equipment

1 Parallelogram

Multiple file item

- Fixed load. Leaf springs.
- Variable load Springs with adjustable load

2 Support accessories holder

3 Hoes Kit

4 Ridger

N°2 for each row

Various sizes

Ridger

Customized component

Parallelograms alternated with or without extension

SPECIFICI-MINITRACTOR

Light frame

Led work light adjustable

Front LED lights

Third hydraulic point connection, 300 mm vertical excursion, for special applications such as the fertilizer spreader.

Internal connection consisting of a square bar for fixing rotosark elements with a vertical travel of 300 mm.

Lombardini twin / three / four cylinders from 18-27-40 hp, respectively

LED lights of position rear

Rotoblizz

Rotovert

Colibrì