



INTER ROW WEEDING MACHINES RANGE

www.oliveragro.com

Index

| | | | |
|----------------------------|-----------|---|-----------|
| Equipment choice selection | 4 | Use e Smart Farming | 21 |
| Our Technology | 6 | Our precision weeding machines proposal | 22 |
| Rotors and disks | 7 | Rotosark | 24 |
| Rotoblizz rotors | 7 | Rotostar | 26 |
| Rotovert rotors | 8 | Rotohemp | 28 |
| Colibrì disks | 10 | Rotofilm | 30 |
| Rotofilm rotors | 11 | Rotovert | 32 |
| Rotoclean disks | 12 | Rotovert TILT-I | 34 |
| Rotodisk rotors | 13 | Rotoclean | 36 |
| Frames | 14 | Rotodisk | 38 |
| Automatic systems | 16 | Colibrì | 40 |
| Elements | 18 | Colibrì on ridges | 44 |
| Rotosark and Rotovert | 18 | Rotobrush | 46 |
| Inter-row Element | 19 | Optyma 2.0 | 50 |
| Rotovert TILT-I | 20 | Differences from competitors | 46 |
| Rotoclean | 21 | | |
| Benefits of weeding | 21 | | |

Discover our weeding machines *suitable for your crop*



BEETS

| | Rotosark | Rotovert | Colibrì | Optyma |
|------------|----------|----------|---------|--------|
| SUGAR BEET | • | | | |



BULB

| | | | | |
|--------|---|---|---|--|
| GARLIC | • | • | | |
| ONIONS | | • | • | |
| LEeks | • | | | |



ARTICHOKES

| | | | | |
|------------|---|--|--|--|
| ARTICHOKES | • | | | |
| CARDON | • | | | |



CEREALS

| | | | | |
|---------|---|---|---|--|
| CORN | • | | | |
| SORGHUM | • | | | |
| RICE | | • | • | |



CRUCIFERS

| | | | | |
|-------------|---|--|--|---|
| CABBAGE | • | | | • |
| BROCCOLI | • | | | • |
| CAULIFLOWER | • | | | • |



FLOWERS

| | | | | |
|----------------------|---|--|--|--|
| SUNFLOWER AND CANOLA | • | | | |
|----------------------|---|--|--|--|



LEAVES

| | | | | |
|-------------|---|---|---|---|
| LETTUCE | • | • | | • |
| RADICCHIO | • | • | | • |
| CHICORY | • | • | | • |
| BEET GREENS | | • | • | • |
| CHARD | • | | | • |



FRUIT

| | | | | |
|--------------|---|--|--|--|
| TOMATOES | • | | | |
| STRAWBERRIES | • | | | |
| PUMPKIN | • | | | |



BUSHES

| | | | | |
|--------|---|--|--|--|
| FENNEL | • | | | |
| CELERY | • | | | |



AROMATIC HERBS

| | Rotosark | Rotovert | Colibrì | Optyma |
|---------|----------|----------|---------|--------|
| PARSLEY | | • | • | |
| BASIL | | • | • | |



FOURTH RANGE

| | | | | |
|--------------|--|---|---|--|
| VALERIAN | | | • | |
| MIXED GREENS | | | • | |
| MESCLUN | | | • | |
| ROCKET | | • | • | |



TRANSPLANTS

| | | | | |
|-----------|---|---|--|--|
| SHOOTS | | • | | |
| ROOTSTOCK | • | | | |
| ROSES | • | • | | |



LEGUMES

| | | | | |
|-------------------|---|--|--|--|
| SOYA | • | | | |
| BEANS-GREEN BEANS | • | | | |
| PEANUTS | • | | | |
| CHICKPEAS | • | | | |
| LENTILS AND PEAS | • | | | |
| FAVA BEANS | • | | | |



ROOTS

| | | | | |
|----------|--|---|---|--|
| CARROTS | | • | • | |
| PARSNIP | | • | • | |
| RADISHES | | • | • | |
| TURNIPS | | • | • | |



TUBERS

| | | | | |
|----------|---|--|--|--|
| POTATOES | • | | | |
|----------|---|--|--|--|



OTHER CROPS

| | | | | |
|-----------------|---|--|--|--|
| MEDICINAL HERBS | • | | | |
| TOBACCO | • | | | |
| HEMP | • | | | |

MULCHED CROPS: ROTOFILM
CROPS ON SMALL RIDGES: ROTOCLEAN
CROPS ON LARGE RIDGES: ROTODISK

Our **technology**


Innovative aspects and efficiency

Oliver Agro was **the first company in the world to produce steel rotors** for weeding machines, developing further **unique models for long-lasting but also effective use:**

Rotoblizz, Rotovert, Rotoclean, Rotodisk and Colibrì discs.

Rotoblizz rotors

WORKING ON FLAT

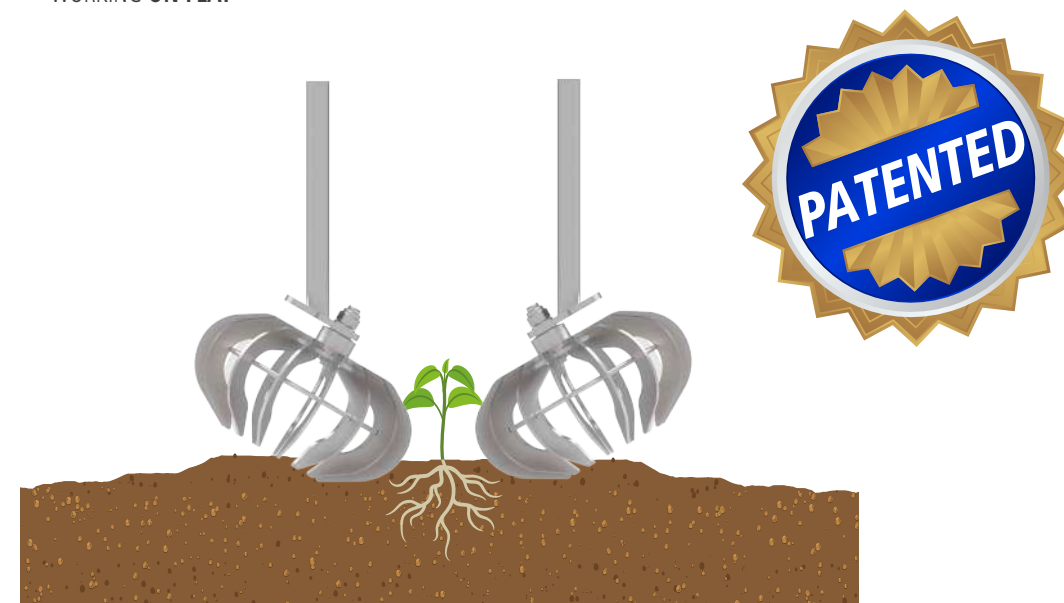

Rotoblizz rotors work directly on the row of plants without damaging the roots or leaves due to their round shape.


The anti-intrusion reinforcement rod welded inside the rotor allows even heavy, stony soil to be worked. Rotating counter to each other at the same depth of 3–4 cm, they keep the plant straight, pushing the top of the soil towards the centre of the row and breaking it into pieces. In the meantime, the blades rotate to move weed sprouts or the weeds themselves outwards.

They are made of steel and have a fixed inclination of 28 cm towards the plant. They rotate due to a sealed bearing and are welded with curved, hook-shaped blades with a width of 3 cm.

| ROTOBLIZZ DIMENSIONS | | | | |
|--|----------|----------|---------|---------------------|
| DIAMETER | 30 cm | 35 cm | 40 cm | Rotofilm |
| INTER-ROW SPACING | 40-45 cm | 50-60 cm | > 60 cm | Mulched crops |
| USABLE WORKING SURFACE AREA FROM THE PLANT | 12 cm | 14 cm | 16 cm | 2 cm from the mulch |
| DISTANCE FROM THE PLANT | 2 cm | | | |

Rotoververt rotors

WORKING ON FLAT

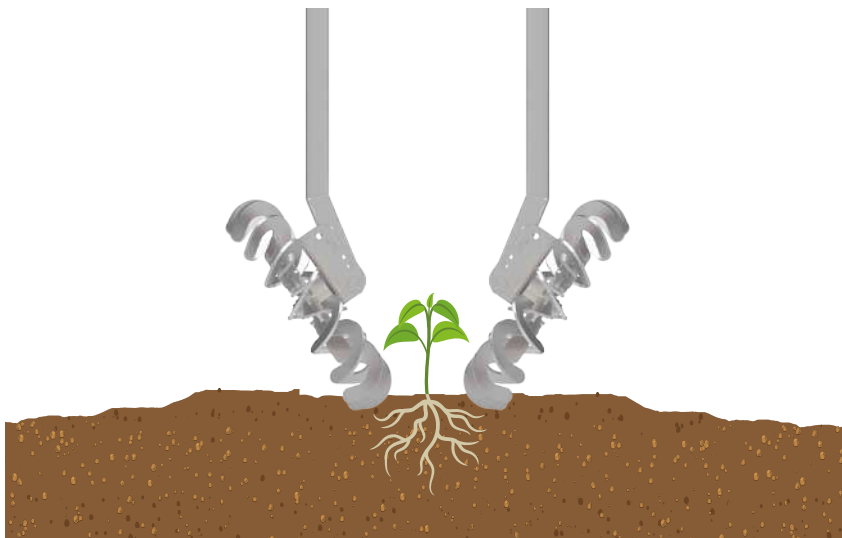

Rotoververt rotors, that is, vertical rotors, act like Rotoblizz rotors, but can be used on narrower inter-row spaces due to their shaped profile: 13–45 cm.

Rotating counter to each other at the same depth of 2–3 cm, they keep the plant straight, pushing the top of the soil towards the centre of the row and breaking it into pieces. In the meantime, the blades rotate to move weed sprouts or the weeds themselves outwards.

They are made of steel and have an inclination that is adjustable in 5 positions from 67° to 42° towards the plant. They rotate due to a sealed bearing and are welded with curved blades with a width of 3 cm.

Usable working surface area from the plant 4,5-5,5 cm.

Efficiency results

Source BULLETIN SEMENCES N°6

Optimal conditions: dry soil, loose with few stones.

Weed density: variable.

Crops: alfalfa, medicinal herbs, carrots, parsley.


Stage of development: cotyledon.

Passing at 7–8 km/hr.

Moderate amounts of soil were observed on the row, smothering the weeds in the initial stage.


The test showed good results 7 days later, with 83–97% effectiveness.

Only the weeding of grasses on carrots is 57%, because they were too developed in the row.

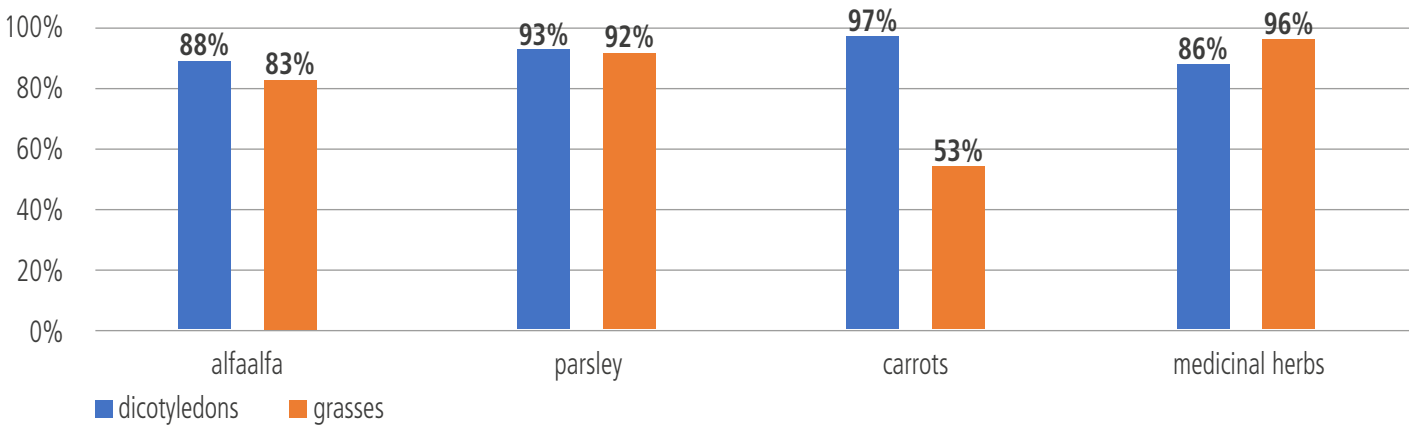


Source: BULLETIN SEMENCES N°6

Effectiveness

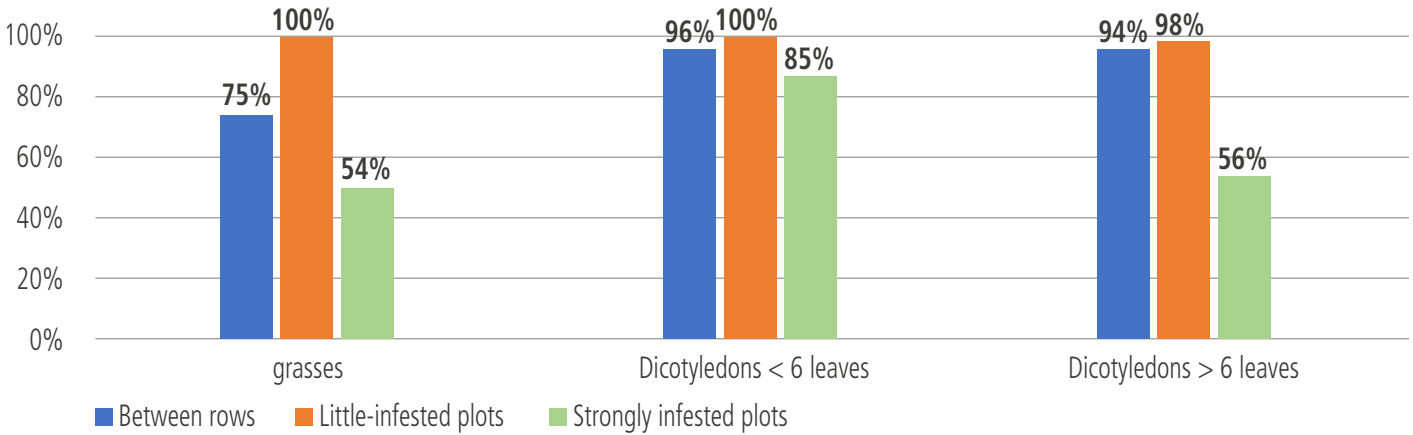

Source Arvalis Institut du Vegetal

Effectiveness in eliminating weeds with different degrees of infestation

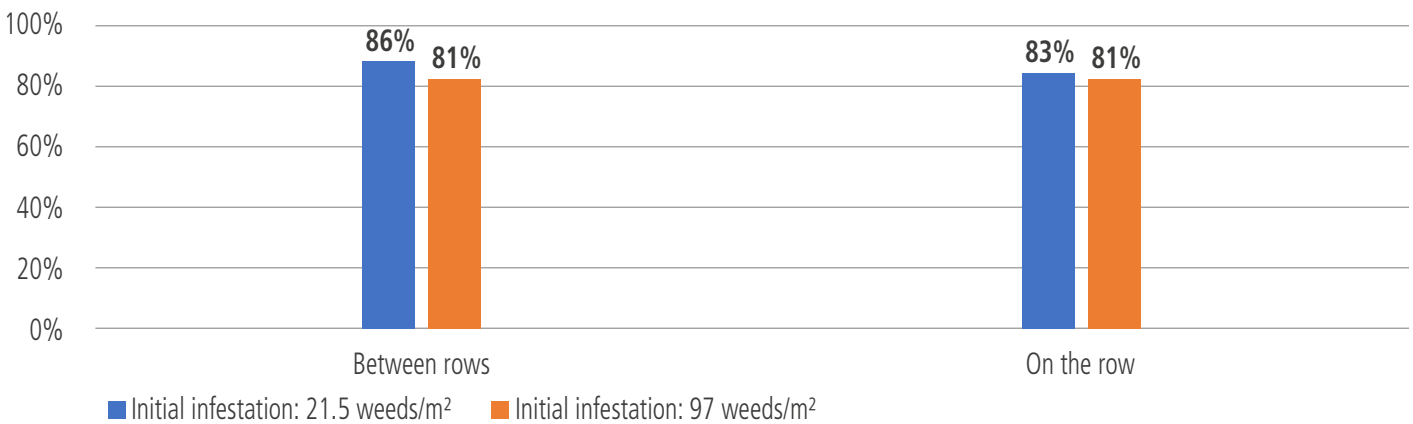

Source AGROÉQUIPEMENT

Colibrì discs

WORKING ON FLAT

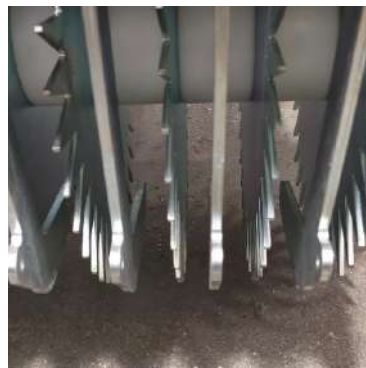
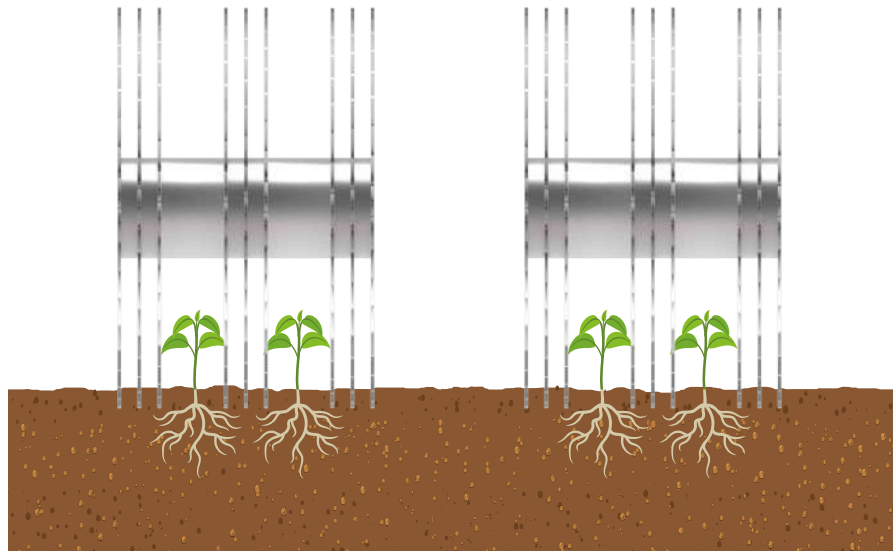


Figure 1
Colibrì, Straight teeth
(inter-row spacing 4.5–5 cm)



Figure 2
Colibrì, Angled teeth
(inter-row spacing 6–7 cm)

The COLIBRÌ motorized disc pack weeds actively, working at a depth of 2 cm. The height is adjusted via a hydraulic piston controlled electrically via a linear potentiometer to determine the actual working depth.

Weeding with COLIBRÌ allows for work in several rows at once starting from 5 cm, with a coverage of 80% of the surface tilled by the COLIBRÌ disc, equal to 60% of the surface of the entire bed.

The COLIBRÌ weeding machine used on fourth-range crops increases and improves production:

1. The seedlings sprout earlier so they can be harvested earlier than non-tilled crops.
2. For rocket, a further benefit - aeration - is seen after the first pass.

A unique characteristic on the market, there are two types of COLIBRÌ disc teeth: Teeth are straight (Fig. 1) or angled opposite to the plants, protecting the plant by pushing the soil outwards. Suitable for narrow inter-row distances of 4.5 cm, or when the plant is in the first stages of growth and therefore very delicate.

Curved sawtooth teeth (Fig. 2) arranged in the spaces not occupied by the seedlings remove weeds and increase the working range of the weeding action.


The discs have a diameter of 320 mm, while the teeth are 40 mm in height and work at an adjustable depth equal to or less than 30 mm, to preserve the leaf collar of the plant. Both the speed and configuration of the discs can be adjusted based on the stage of plant growth and soil type.

Rotofilm rotors



NEW

OLIVER
AGRO

WORKING ON BEDS WORKING ON RIDGES

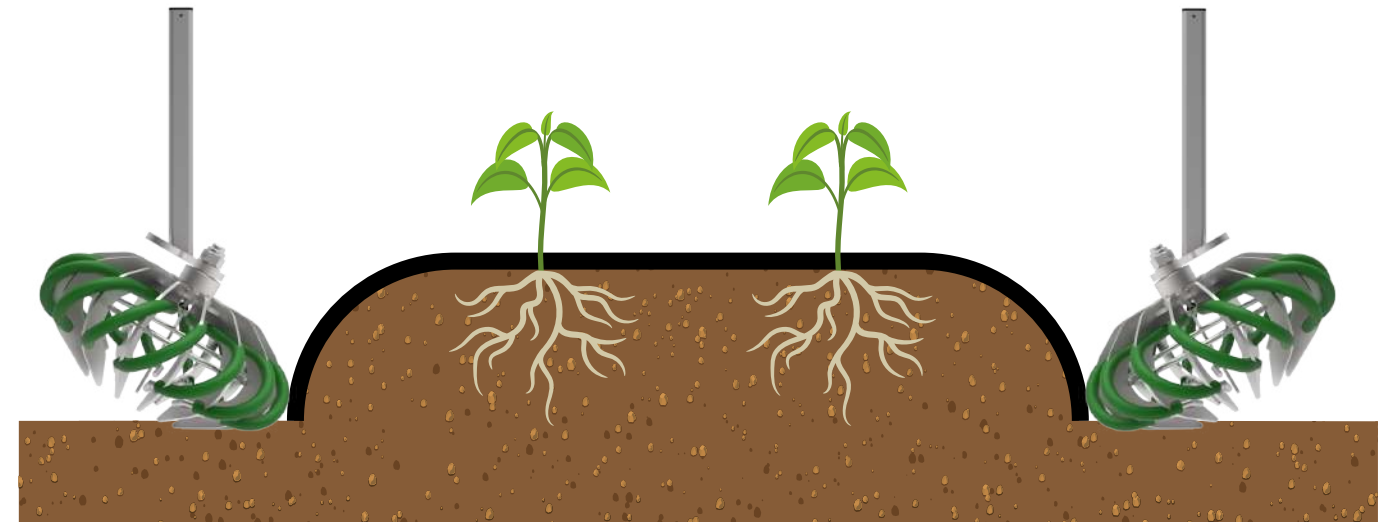

Rotoclean discs

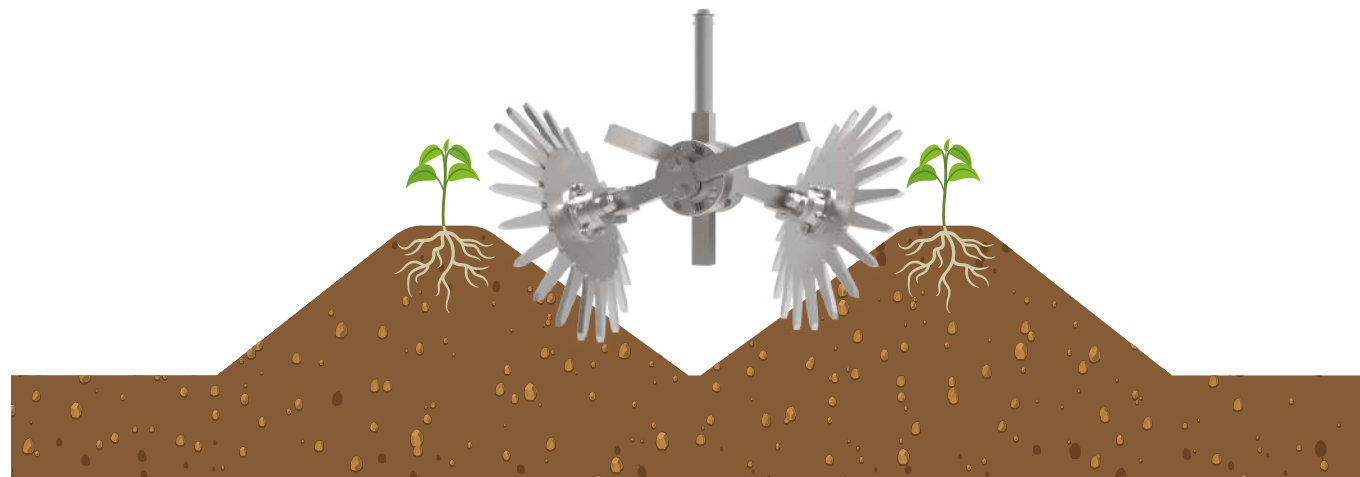

ROTOCLEAN discs are designed to loosen and work the soil to a depth of about 2 cm from the side of the mound and turn it over, dropping any weeds and stopping their germination. When in contact with the soil, the special star-shaped disc with 20 radial points allows the tiller to move forward easily. Given the convexity (to the right or left depending on the position on the ridge) with an angle of 20° , it turns over weeds growing on the side, allowing the soil to fall and drying out the weeds.

Rotodisk discs



Rotodisk discs are designed to loosen the soil and turn it towards the upper part of the ridge. When in contact with the ground, the special curved 15-point star shape allows the tiller to move forward easily. Given the convexity (to the right or left depending on the position on the mound) with an angle of 15° , the soil is lifted as with a simple convex disc, with the difference that the soil is not retained and thus compacted at the sides, but is released, mixing along the side and removing any weeds that may have formed.

Frames

Frames and machine alignment with crops

1. **Fixed Frame**, with wheels of height/fixed with no guide.



2. **Fixed frame with guiding wheels, handlebar steering, and operator seat.**

Mechanical steering via a handlebar acts on the front wheels of the machine; a rear operator is required for control; suitable for light machines.



3. **Fixed frame with rotating wheels, electro-hydraulic steering with joystick and operator seat.**

The joystick acts on the front wheels of the machine; a rear operator is required for control. Suitable for heavier machines. Wings/side sections can be made to fold for road transport.



4. **Hydraulic shifting frame, fixed wheels, joystick driving and operator seat.**

The frame consists of 2 sections: a fixed part attached to the tractor and a second driven by hydraulic cylinders. Steering via a joystick (which can be removed) moves the elements on the second frame. Suitable for heavier machines. An operator is required if there is no automatic camera.



With RTK on the tractor, the driver can move the weeding machine elements, controlling 1 or more rows on a 10.4" HD monitor using the joystick in the cab. Wings/side sections can be made to fold for road transport.



5. **Hydraulic shifting frame, fixed wheels, automatic guiding with TILLET & HAGUE (T&H) camera, no rear operator.**

Wings/side sections can be made to fold for road transport.



The *automatic systems*

THE PLANT ALIGNMENT AND RECOGNITION SYSTEM: AUTOMATIC AND WITH A.I.

The optical guidance systems adopted are three:

- 1) Automatic inter-row alignment system
- 2) Automatic inter-plant – inter-row plant recognition system
- 3) A.I. inter-plant – inter-row plant recognition system

The first two automatic systems collect data from digital cameras to identify areas of interest, such as rows, individual cultivated plants or weeds. An area as wide as possible is considered to maximize the data on which the guidance is based.

The system analyzes a green/red ratio to identify the crop and weeds from the background containing soil, stones and other materials, enabling crops of different colors to be worked. The display shows a frame captured by the lens, corresponding to a part of the cultivated plants sufficient for analysis. The touch-screen display shows guidelines or traes that demonstrate the quality of the correspondence, meaning the exact adjustment of both the camera and software settings. When weeds are detected, a graphic is overlaid to show their perimeter.

The position of the tracks is used to align the elements of the weeder with the identified rows. Additionally, and no less importantly, in Optyma, the opening of the weeding element is synchronized with the individual plants as they pass under the tool.

With the third system, an Artificial Intelligence system is applied for accurate plant recognition in relation to weeds. The A.I.-based solution is immediately operational, designed to adapt to any situation or crop, even in fields with significant infestations or difficult soil preparation conditions.

Installation is simple and quick; it detects roots instead of leaves, meaning the actual center of the plant. It works effectively with any sun position, and the recognition is extremely fast.



AUTOMATIC WORKING DEPTH MANAGEMENT SYSTEM


The depth management system is specific to Optyma and Colibri and has the following features:

- Manual depth positioning for each individual element with 3-mm steps
- The desired depth is automatically maintained
- Speed adjustment of the discs, either manually or by synchronizing the disc revolutions per minute with the speed of the tractor (only for Colibri)
- Automatic adjustment of the reaction time from the probe to the discs in Colibri or to the blades in Optyma (suitable for low speeds 0.5–1 km/h)
- Dedicated function for aligning all elements horizontally
- Zero setting set in the factory
- Possibility of setting a dedicated dead band before the probe gives the signal to correct the height
- Screen display of machine values
- Screen for displaying routine maintenance
- Screen for displaying and modifying parameters (only accessible to specialized technicians)
- Possibility of implementing remote assistance
- Alarms if the machine is used improperly
- Alarm and machine block if the oil overheats excessively
- Alarm and machine block if any stones/crop residues get jammed in the discs, via a pressure switch for each element in Colibri and via an inductive sensor in Optyma
- Alarm for blocked discharge filter
- Inductive sensor to detect the machine raised from the tractor or resting on the ground to activate and deactivate the self-levelling system



The *elements*

Rotosark, Rotovert and Rotostar elements



The elements consist of a parallelogram with parallel bars, a crank-operated variable-load spring and a strut with multiple slots for various tools and accessories, such as surface-breaking hoes or the Colibri disc kit, a pair of opposing Rotoblizz/Rotovert/Rotostar rotors made of steel with sealed bearings, a pair of rear swallow-tailed hoes for working in between the rows, or accessories such as a pair of deflectors for earthing up the plants or a Rotodisk kit and harrow teeth. The two opposing rotors straddle the cultivated row, guaranteeing constant pressure and yielding greater precision and proximity than in an inter-row parallelogram, where uneven terrain can exacerbate drift due to excessive steering. The configuration of the parallelogram allows for vertical movement perpendicular to the ground, acting directly on the pair of rotors. Positioned thus, the rotors act as a level, making a support wheel unnecessary. Depending on the number of accessories to be applied to the element, we can have different beam lengths of 1000 mm, 1200 mm, and 1500 mm.

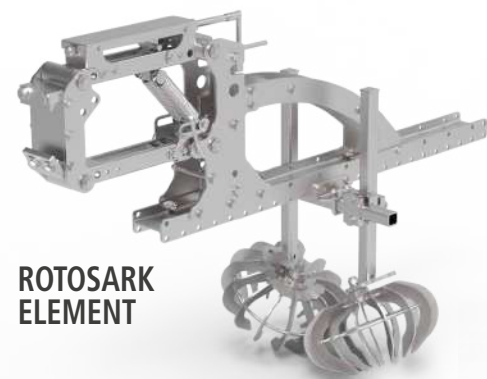


**ROTOSARK
ELEMENT**

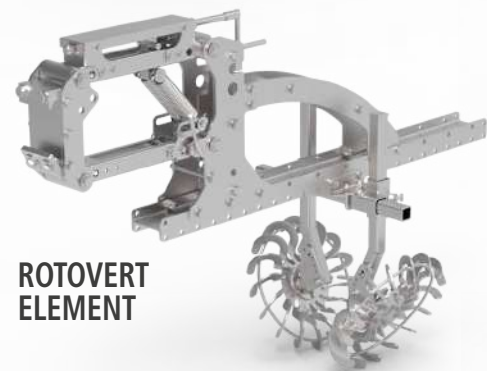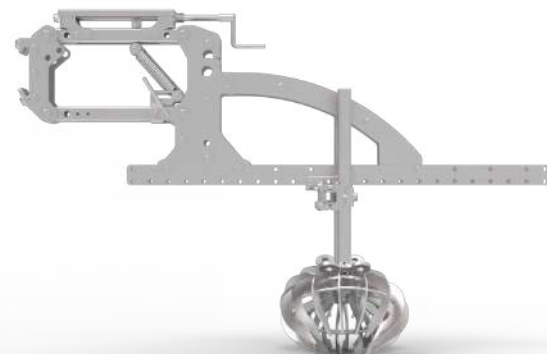

**ROTOVERT
ELEMENT**

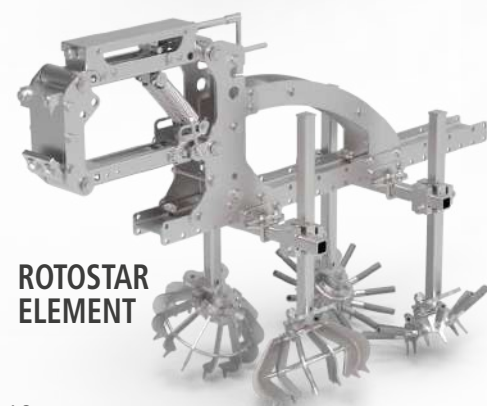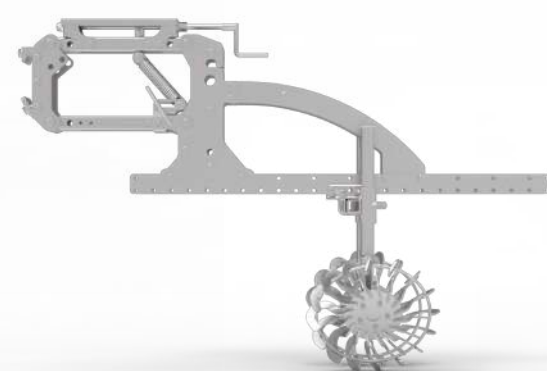

**ROTOSTAR
ELEMENT**

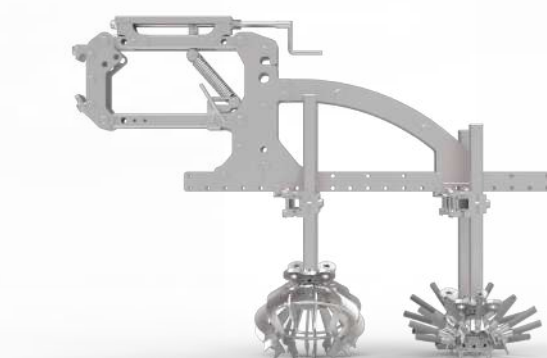


Inter-row element for Rotosark, Rotofilm, Rotodisk and Rotoclean



The levelling wheel is a kit designed for use on all elements, allowing for height adjustments depending on the necessary work. Oliver Agro uses levelling wheels on all elements without spring support systems that work between the rows so that the element is directly controlled by the contour of the ground.




BASIC ELEMENT

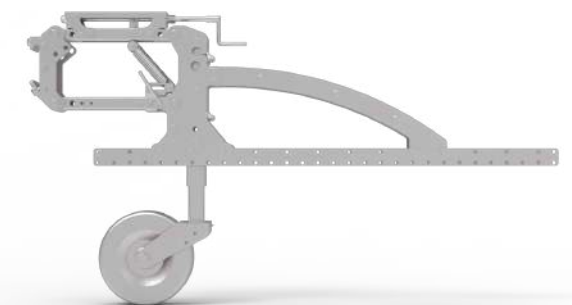


ROTOFILM ELEMENT

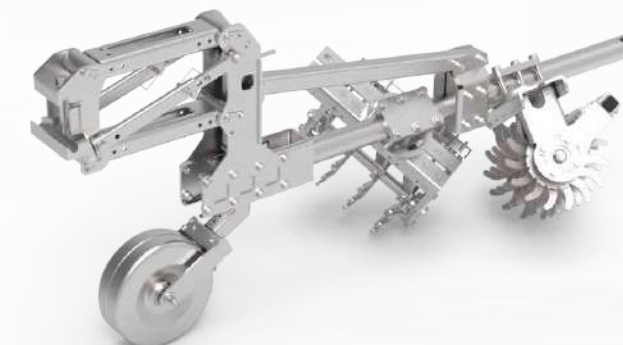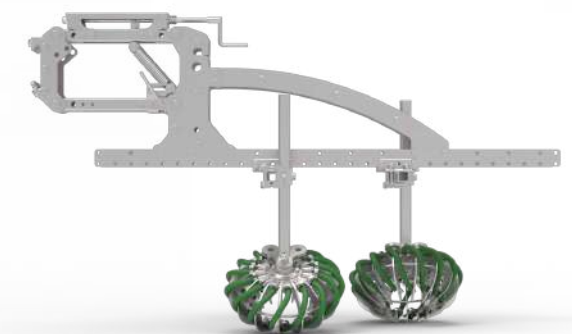


ROTODISK ELEMENT

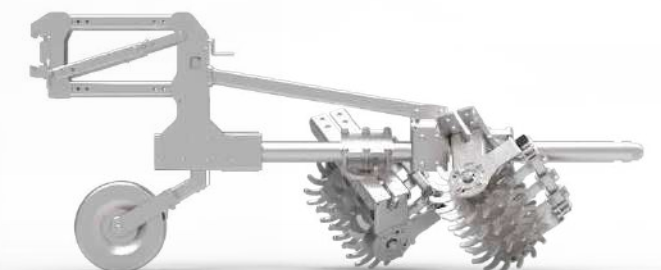

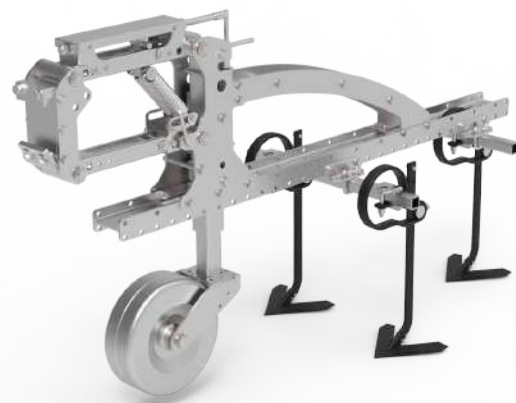

WEEDING ELEMENT

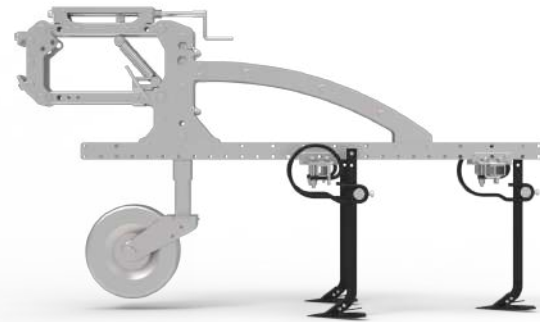



Rotovert TILT-I element

The TILT-I Element is a structure consisting of two distinctive sections. The first section is constructed with a parallelogram mechanism that serves as support for a leveling wheel, equipped with an adjustable spring and a small plow that performs pre-processing and pre-breaking of the soil.

The second section is comprised of a tube in which the Rotoverts are housed. The two rotors can adapt to variations in the terrain and are subject to even pressure, which is adjustable through the use of two adjustment springs.



In addition to its tilting capability, the two rotors can vary their angle through a toothed washer. This tilt is adjustable within the range of 0° to 45°, allowing adaptability to the type of crop and the plant's developmental stage.

The TILT-I Element operates in the inter-row space in synchronization with the opposing rotors and can be configured to adapt to different inter-row distances, ranging from 13 cm to 25 cm, in order to meet the specific needs of the crops.

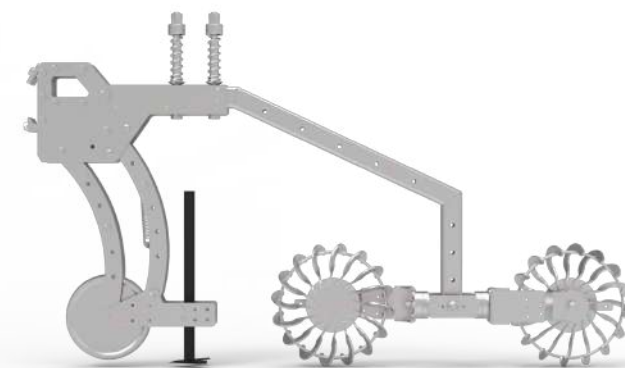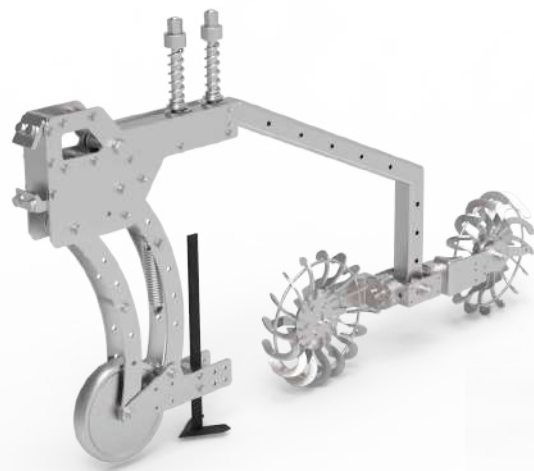

Rotoclean element

The ROTOCLEAN elements consist of a parallelogram with parallel bars, an adjustable support wheel, and a strut for various tools and accessories: a pair of Rotoclean rotors made of steel with sealed Agrihub bearings, along with a rear swallow-tailed hoe for working in between the rows and a deflector for earthing up plants.

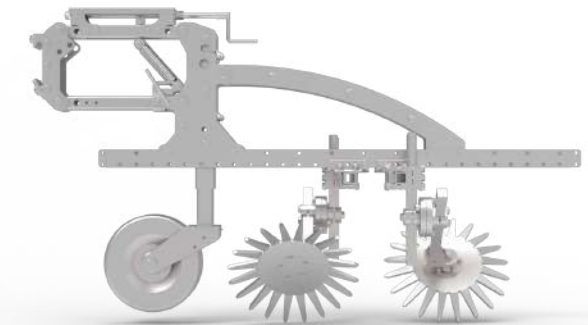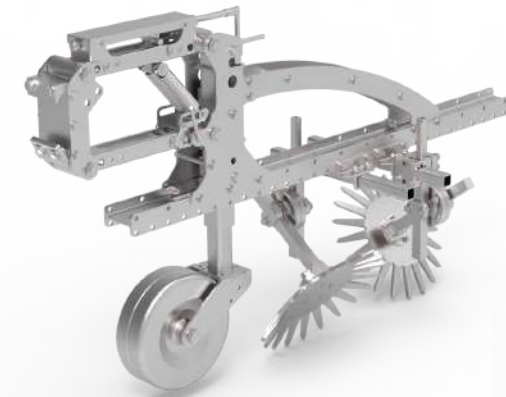

Benefits of weeding

Weeding breaks up and mixes the surface layer of the soil between rows, yielding certain benefits, such as:

1. breaking up the surface to interrupt the vertical channels created in the soil after prolonged periods of drought, thereby aggravating the water deficit;
2. a more uniform incorporation of rainwater during precipitation, which enables better absorption for the upper part of the root system and a reduction in surface runoff, which is one of the causes of erosion;
3. effective mechanical weeding, that is, a viable alternative to chemical weeding, eliminating and reducing the application of chemicals and therefore costs.

Our weeding machines combine these aspects, benefitting crops and production.

Use

As can be seen from the graphs, we recommend weeding as a preventive method, ideally 7 days after transplanting or 10 days after sowing, and whenever weeds are in the cotyledon or germinating stage, for optimal aeration and breaking up the surface, while a second pass is required if the weeds are already grown.

Smart Farming 4.0

Our machines can be equipped with the 4.0 Kit for connectivity and custom job data collection.

Our *precision weeding machines* proposal



Rotosark

Pag. 24



Rotofilm

Pag. 30




Rotoclean

Pag. 36



Colibrì on ridges

Pag. 44

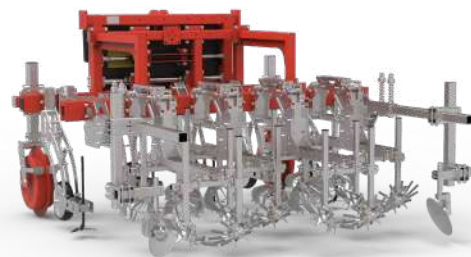

Rotostar

Pag. 26



Rotovert

Pag. 32




Rotodisk

Pag. 38



Optyma 2.0

Pag. 50

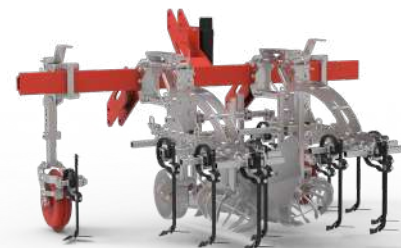

Rotohemp

Pag. 28



Rotovert TILT-I

Pag. 34



Colibrì

Pag. 40

Rotosark

Rotosark weeding machine with fixed, shifting, or folding frame; modular with one or more parallelograms that work on sown or transplanted rows.



| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy/medium texture and stony (with small stones: about 3–4 cm in diameter) |
| INTER-ROW DISTANCE | Minimum 40 cm/16" – 80 cm/31.5" |
| INTER-PLANT DISTANCE | - |
| ROTOR DIMENSIONS | Fixed inclination 28° Rotoblizz: Ø 30 cm; Ø 35 cm; Ø 40 cm; |
| WORKING SPEED | 3 - 9 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | Good and without crop residues |
| N. OF ROWS | Depending on the transplanter/seed drill in use, also on multiple ridge |
| TYPE OF SYSTEM | Mechanical |
| USE | Intuitive and modular |


Rotosark elements

ROTOSARK ELEMENT
STANDARD
WORKING ON THE ROW




- ① Rotoblizz rotors.
- ② Inter-row weeding kit: works in areas of the soil not worked by the Rotoblizz rotors.

ROTOSARK ELEMENT
STANDARD with accessories
WORKING ON THE ROW

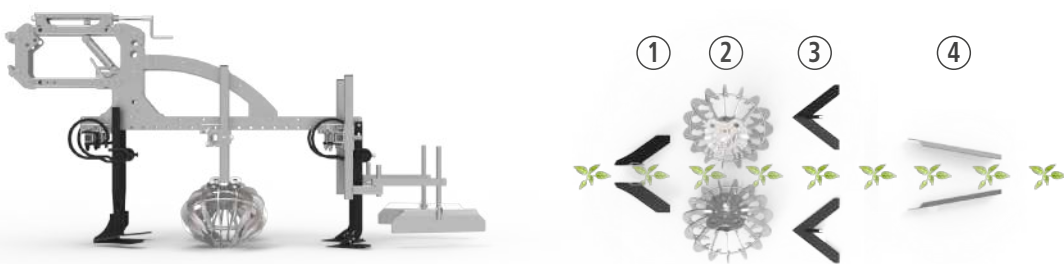

- ① Front side hoes: to break up the soil and removing stones. Suitable for heavy soils.
- ② Rotoblizz rotors.
- ③ Inter-row weeding kit: works in areas of the soil not worked by the Rotoblizz rotors.
- ④ Pair of ridgers: to mound up the soil.

ROTOSARK ELEMENT
INTER-ROW with accessories
WORKING BETWEEN ROWS


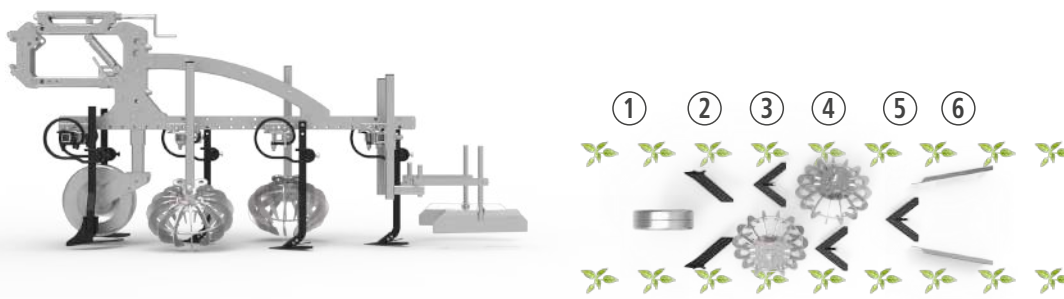


- ① Levelling wheel: to regulate the working depth.
- ② Front side hoes: to break up the soil and removing stones. Suitable for heavy soils.
- ③ Inter-row weeding kit: works in areas of the soil not worked by the Rotoblizz rotors.
- ④ Rotoblizz rotors.
- ⑤ Track loosener hoe: to move the soil following the pass of the levelling wheel.
- ⑥ Pair of ridgers: to mound up the soil.

Rotostar





Rotosark with a fixed or shifting frame with Rotostar rotors; it can be configured with one or more parallelograms that operate on the transplanted row.

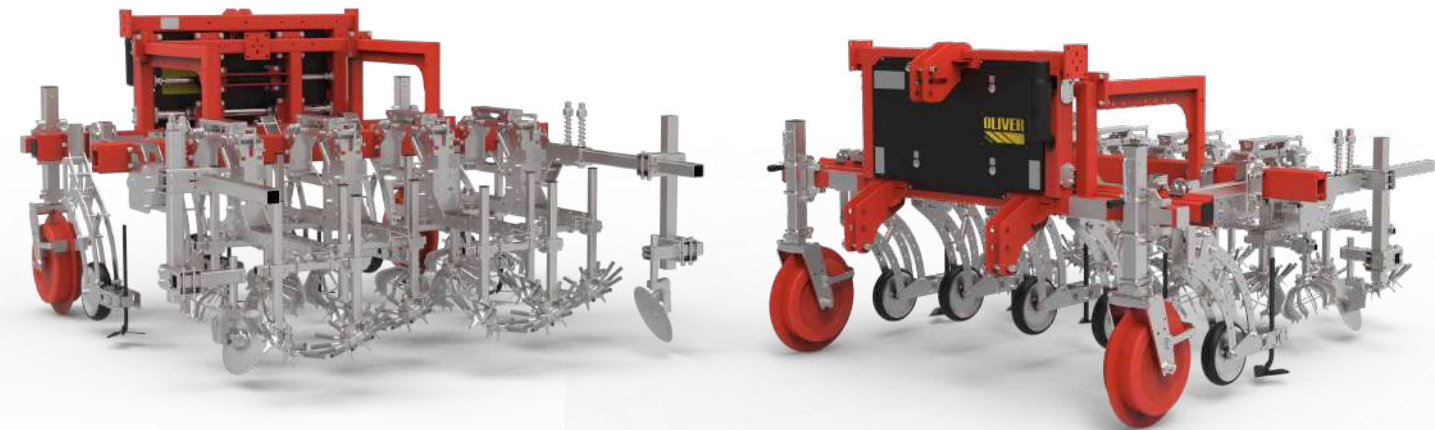

| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy/medium texture and stony (with small stones: about 3–4 cm in diameter) |
| INTER-ROW DISTANCE | Minimum 40 cm 16' (inches) – 80 cm 31' ½ (inches) |
| INTER-PLANT DISTANCE | - |
| ROTOR DIMENSIONS | Fixed inclination 28° Rotostar: Ø 36 cm |
| WORKING SPEED | 3 - 9 Km/h |
| REQUIRED PREPARATION OF THE TERRAIN | Good and without crop residues |
| N. OF ROWS | Depending on the transplanter, even on multiple beds |
| TYPE OF SYSTEM | Mechanical |
| USE | Intuitive and modular |



Rotostar elements

ROTOSTAR ELEMENT
STANDARD
WORKING
ON THE ROW

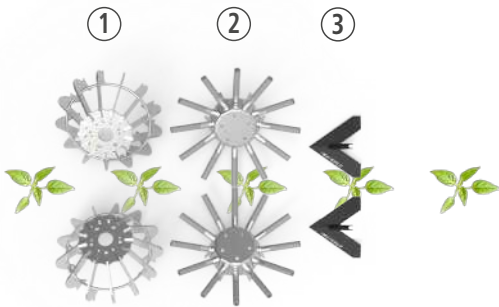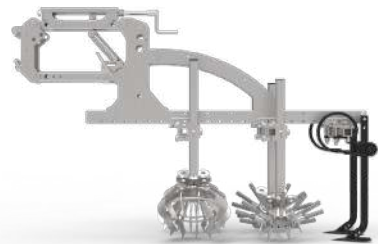

- ① Rotoblizz rotors
- ② Rotostar rotors
- ③ Inter-row weeding kit: works in areas of the soil not worked by the rotors

ROTOSTAR ELEMENT
STANDARD
with accessories
WORKING
ON THE ROW

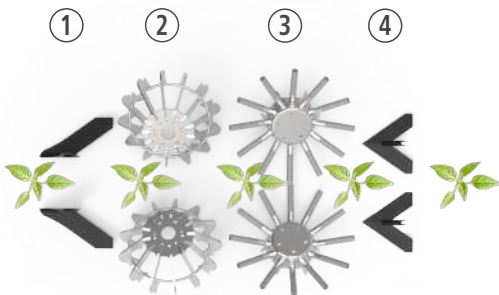
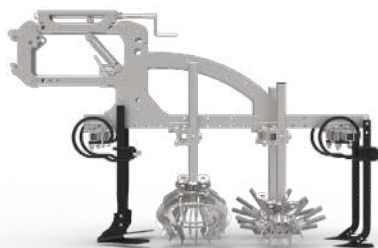


- ① Front side hoes: to break up the soil and removing stones. Suitable for heavy soils
- ② Rotoblizz rotors
- ③ Rotostar rotors
- ④ Inter-row weeding kit: works in areas of the soil not worked by the rotors

Rotohemp

NEW



Rotosark with fixed frame, manual steering on rotating wheels with handlebar and seat, with 1 parallelogram with leaf lifter and side tilling elements. For crops such as pumpkin, artichokes, hemp, and cauliflower.

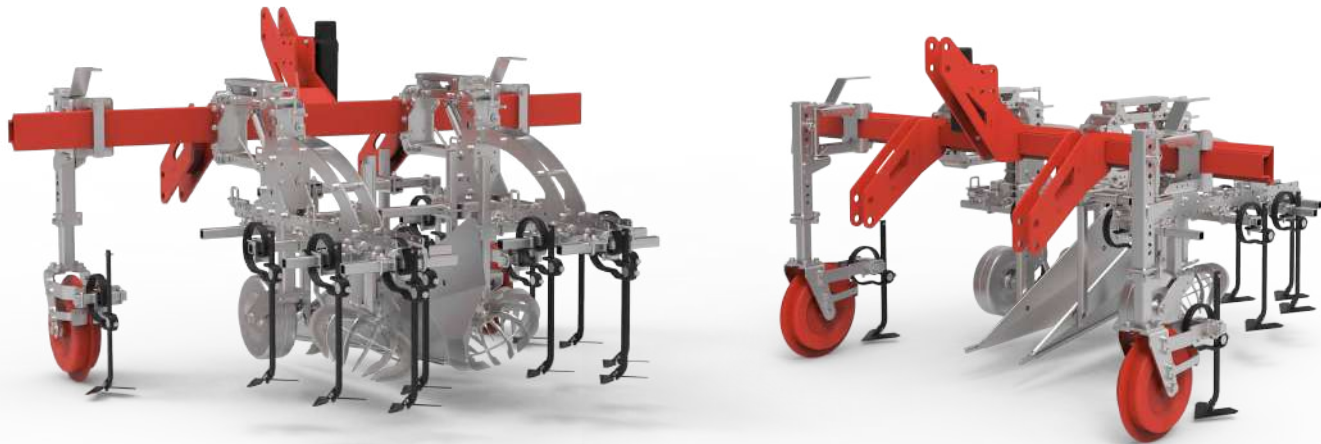

| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy/medium texture and stony (with small stones: about 3–4 cm in diameter) |
| INTER-ROW DISTANCE | 80 cm/31,5" |
| INTER-PLANT DISTANCE | - |
| ROTOR DIMENSIONS | Fixed inclination 28° Rotoblizz: Ø 40cm; |
| WORKING SPEED | 3 - 9 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | Good and without crop residues |
| N. OF ROWS | Depending on the transplanter, even on multiple ridge |
| TYPE OF SYSTEM | Mechanical |
| USE | Intuitive and modular |



Rotohemp element

ROTOHEMP ELEMENT
INTER-ROW
WORKING
ON THE ROW

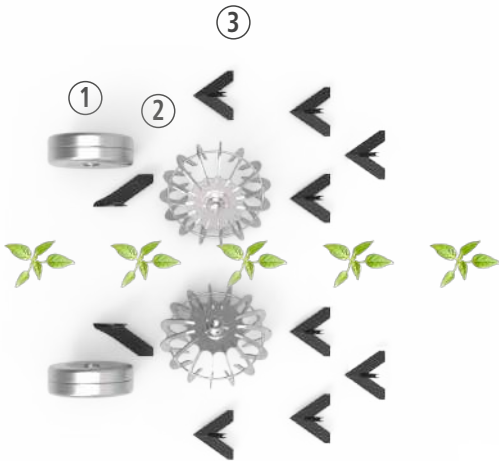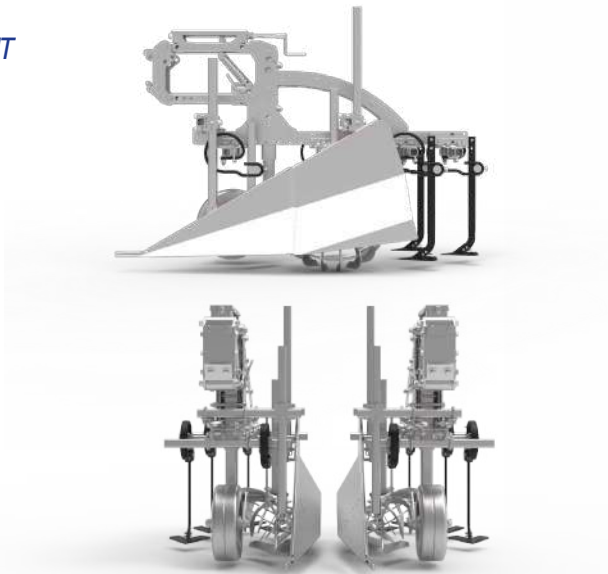

- ① Levelling wheel: to regulate the working depth
- ② Rotoblizz rotors
- ③ Inter-row weeding kit: works in areas of the soil not worked by the Rotoblizz rotors
 - * Pair of leaf-lifters: when the plant is well developed

ROTOHEMP ELEMENT
INTER-ROW
*with double
Rotoblizz/Rotostar rotor*
WORKING
ON THE ROW

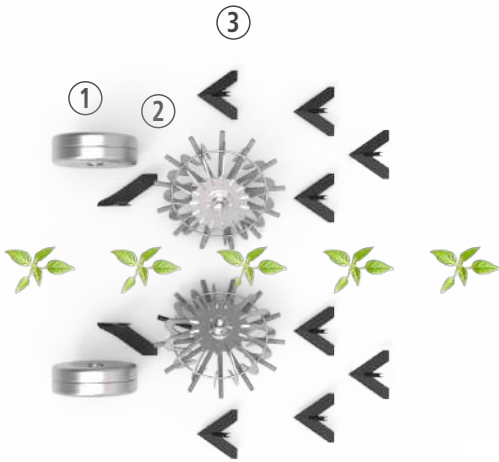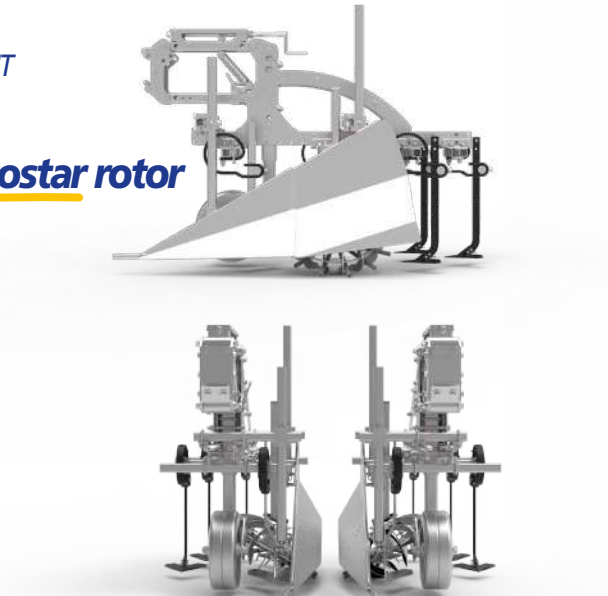

- ① Levelling wheel: to regulate the working depth
- ② Rotoblizz + Rotostar rotors
- ③ Inter-row weeding kit: works in areas of the soil not worked by the rotors
 - * Pair of leaf-lifters: when the plant is well developed

Rotofilm



ROTOFILM: THE WEEDING MACHINE FOR RIDGE WITH PLASTIC MULCH.
 Rotofilm weeding machine with fixed frame, shifter with parallelograms working on the side of the mound or mulched ridge.





| | |
|-------------------------------------|--|
| TYPE OF SOIL | All |
| RIDGE DISTANCE | Minimum 70 cm |
| ROTOR DIMENSIONS | Fixed inclination 28° Rotoblizz Ø 35 cm with ROTOFILM Kit |
| WORKING SPEED | 4 - 7 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | With bed former/mulcher |
| N. OF ROWS | On one or more beds/ridges |
| TYPE OF SYSTEM | Mechanical/Fixed machine |
| USE | Intuitive and modular |

Inter-row Rotofilm element

ROTOFILM ELEMENT
STANDARD



WORKING
BETWEEN ROWS

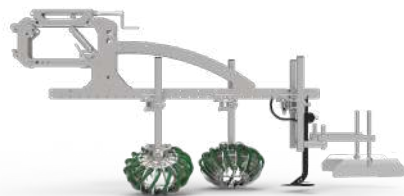

- ① **Rotofilm rotors:** for working the sides of the mound or mulched ridge without ruining it.
- ② **Track loosener hoe:** to move and eradicate the track and lift the soil.
- ③ **Pair of ridges or deflector:** to mound up the soil.


ROTOFILM ELEMENT
STANDARD
with accessories

WORKING
BETWEEN ROWS

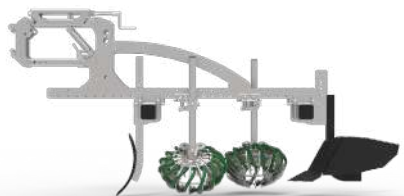

- ① **Track loosener hoe:** to move and eradicate the track and lift the soil
- ② **Rotofilm rotors:** for working the sides of the bed or mulched ridge without ruining it
- ③ **Pair of ridges or deflector:** to mound up the soil.

WORKING SCHEME

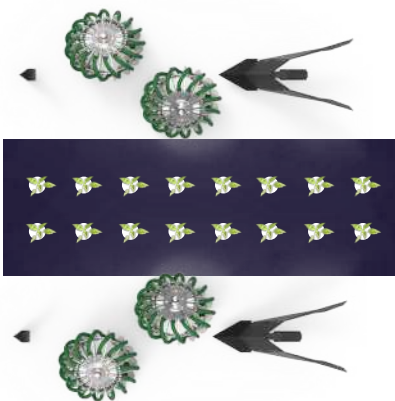

TECHNICAL CHARACTERISTICS


Rotofilm® weeding machine with fixed frame or shifting frame with multiple inter-row parallelograms and a pair of Rotoblizz rotors Ø 350 mm with an anti-intrusion reinforcement rod per row with the ROTOFILM kit, inter-row weeding hoes of 240 mm per row, support wheels Ø 320 mm with depth adjustment, and ridges units when necessary.

ADVANTAGES OF INNOVATION

In addition to the proven benefits of weeding (breaking up the surface, incorporating rainwater and increasing water uptake by the root system, mechanical weeding), safe cleaning work in the presence of PVC or biodegradable weed control fabric is also an advantage. The Rotofilm® weeding machine is the only mechanical means that can work at a speed of approximately about 6–8 km/hr at the side of the weed control fabric throughout the season. Arranged in this way, the machine can be used on all types of mulched crops (lettuce, strawberries, etc.). It can also be used in nurseries for cleaning rootstocks and shoots.

Rotovert

Rotovert weeding machine with fixed, shifting, or folding frame; modular with one or more parallelograms that work on sown or transplanted rows.

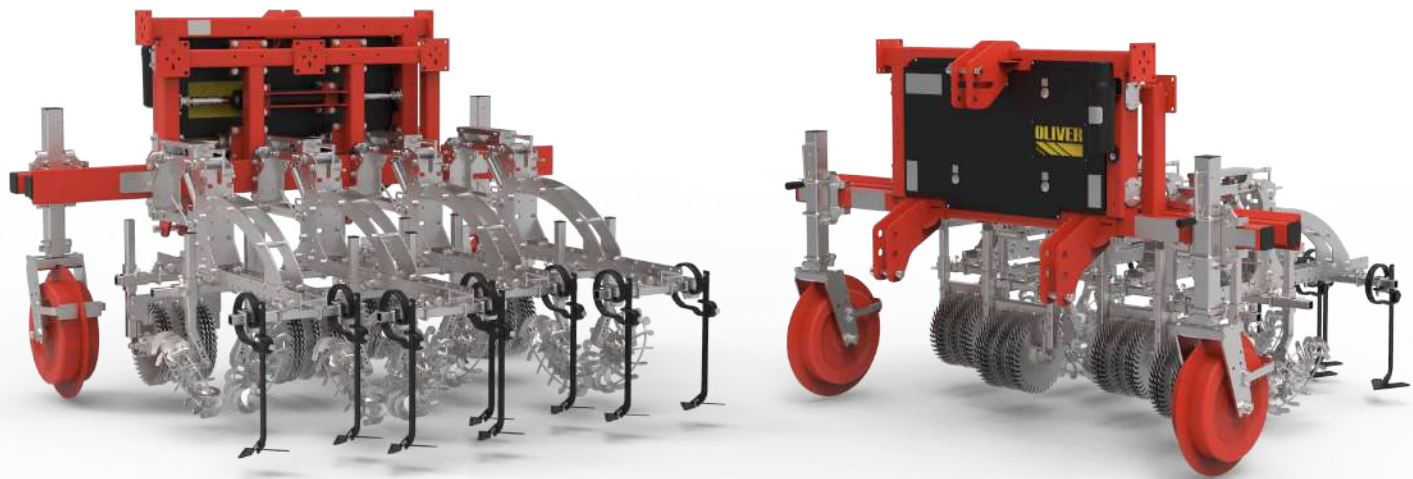

| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy/medium texture and stony (with small stones: about 2–3 cm in diameter) |
| INTER-ROW DISTANCE | Minimum 25 cm, 10" , maximum 40 cm 15" |
| INTER-PLANT DISTANCE | - |
| ROTOR DIMENSIONS | A unique Rotovert model with adjustable angle |
| WORKING SPEED | 2 - 5 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | Good without crop residues |
| N. OF ROWS | Depending on the transplanter/seed drill in use, also on multiple ridge |
| TYPE OF SYSTEM | Mechanical |
| USE | Intuitive and modular |


Rotovert elements

ROTOVERT ELEMENT
SINGLE
WORKING
ON THE ROW




- 1 Rotovert rotors.
- 2 Rear side hoes: for inter-row weeding.

ROTOVERT ELEMENT
WITH ACCESSORIES
WORKING
ON THE ROW

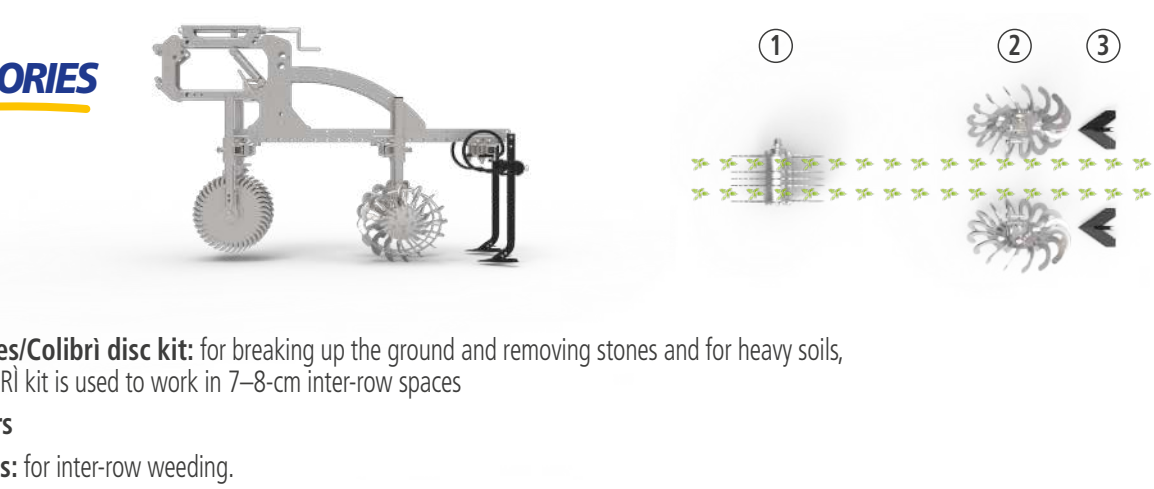



- 1 Front side hoes/Colibri disc kit: for breaking up the ground and removing stones and for heavy soils, while the COLIBRI kit is used to work in 7–8-cm inter-row spaces
- 2 Rotovert rotors
- 3 Rear side hoes: for inter-row weeding.

Rotovert rotor with protections

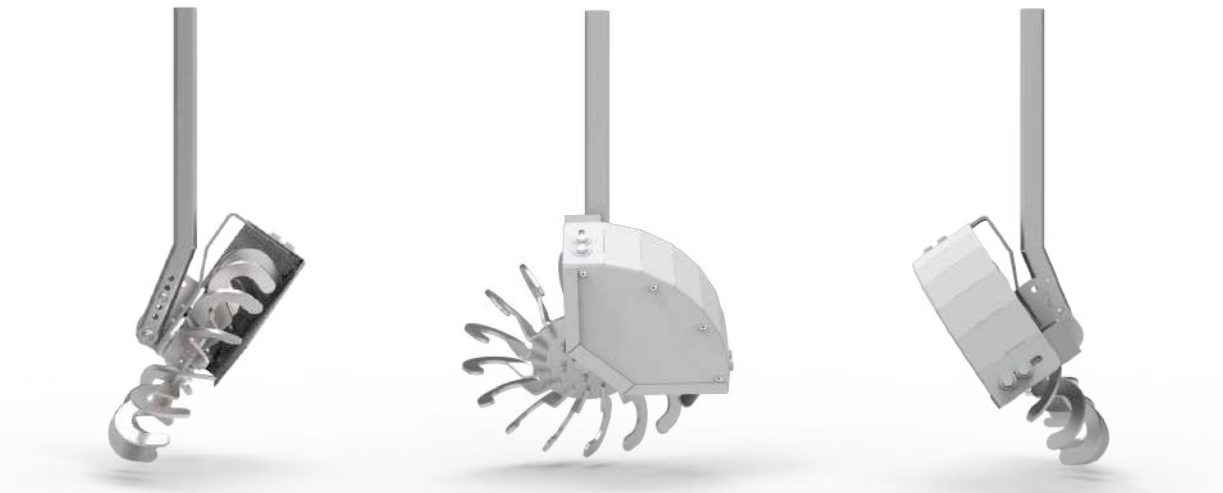

Rotovert TILT-I


“Rotovert TILT-I” weeder with a translating frame; compatible with inter-row parallelograms with adjustable load, working alongside the sown or transplanted row.

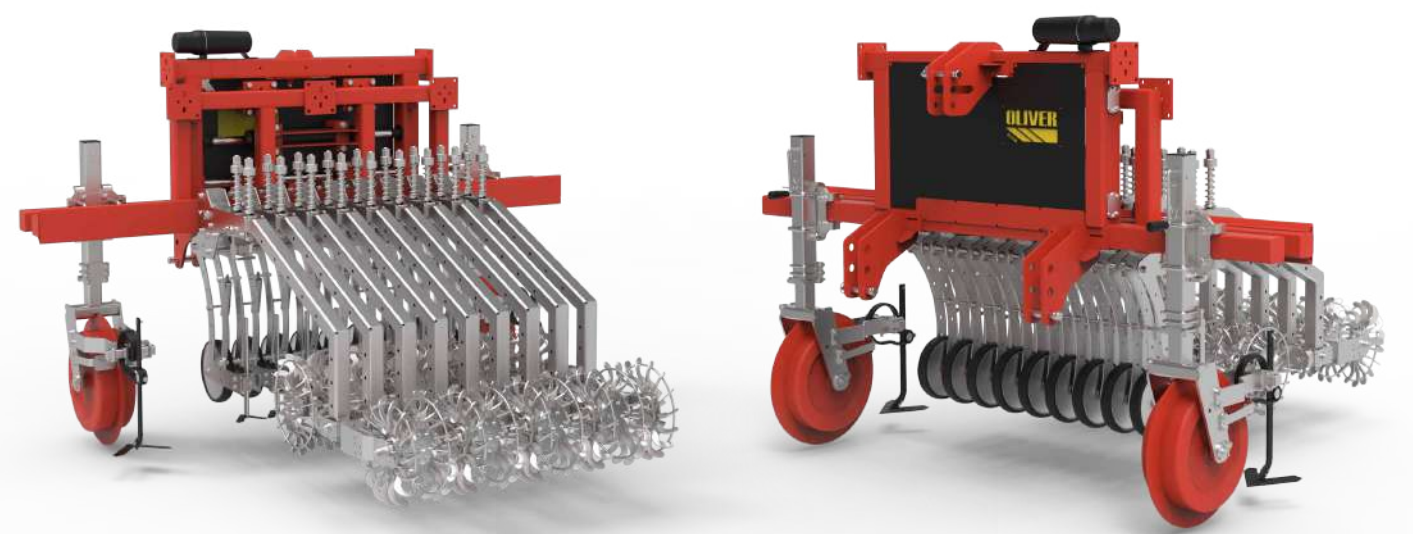

| | |
|-------------------------------------|---|
| TYPE OF SOIL | Sandy/medium texture and stony (with small stones: about 2–3 cm in diameter) |
| INTER-ROW DISTANCE | Minimum 12.5 cm, 6" |
| INTER-PLANT DISTANCE | - |
| ROTOR DIMENSIONS | A single Rotovert model with adjustable tilt from 0° to 60° to enable more specific work in row crops |
| WORKING SPEED | 2 - 5 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | Good without crop residues |
| N. OF ROWS | Depending on the transplanter/seed drill in use, also on multiple ridge |
| TYPE OF SYSTEM | Mechanical |
| USE | Intuitive and modular |


Rotovert TILT-I element

ROTOVERT TILT-I ELEMENT
STANDARD
WORKING
BETWEEN ROWS

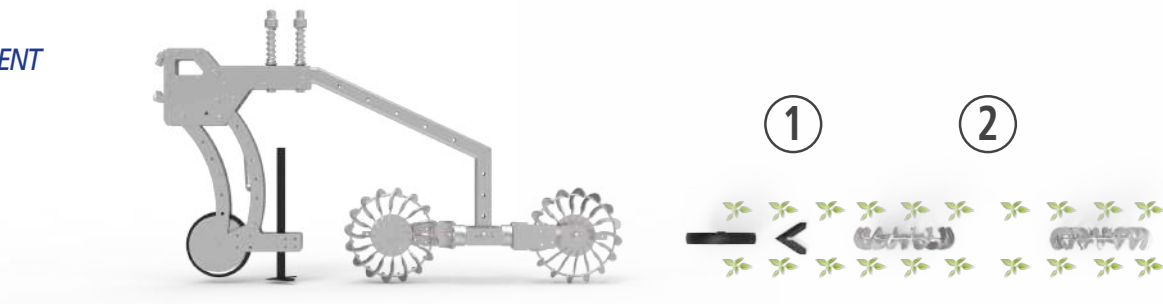


- ① Track loosener hoe: to move and eradicate the track and lift the soil
- ② Rotovert rotors

Rotovert TILT-I conveyors


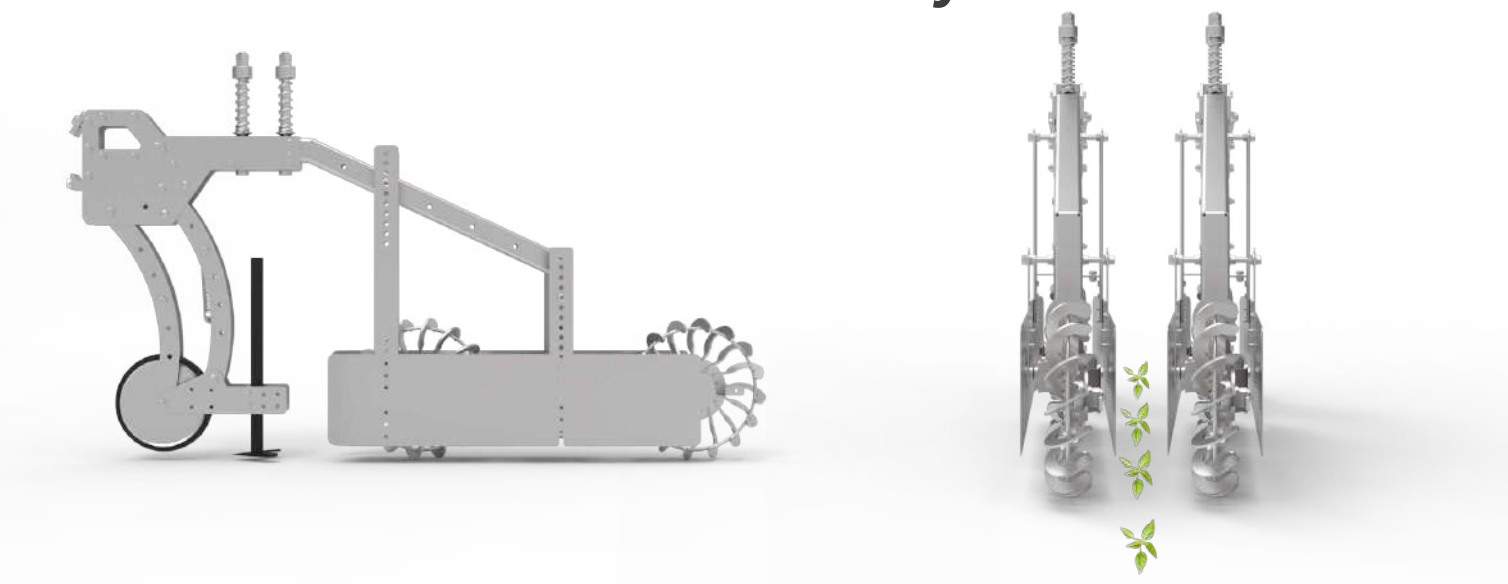


Rotovert TILT-I guards

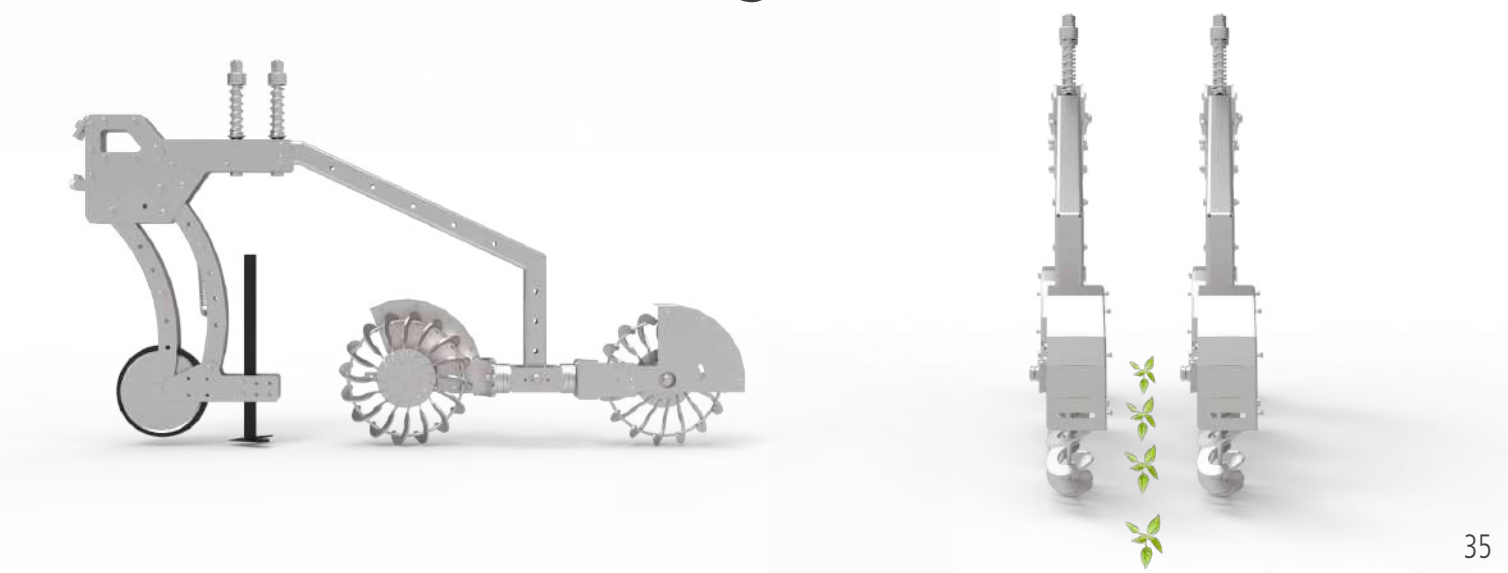

Rotoclean

ROTOCLEAN weeding machine with fixed frame; modular with multiple inter-row parallelograms with support wheel to work at the base of the mound or ridge.

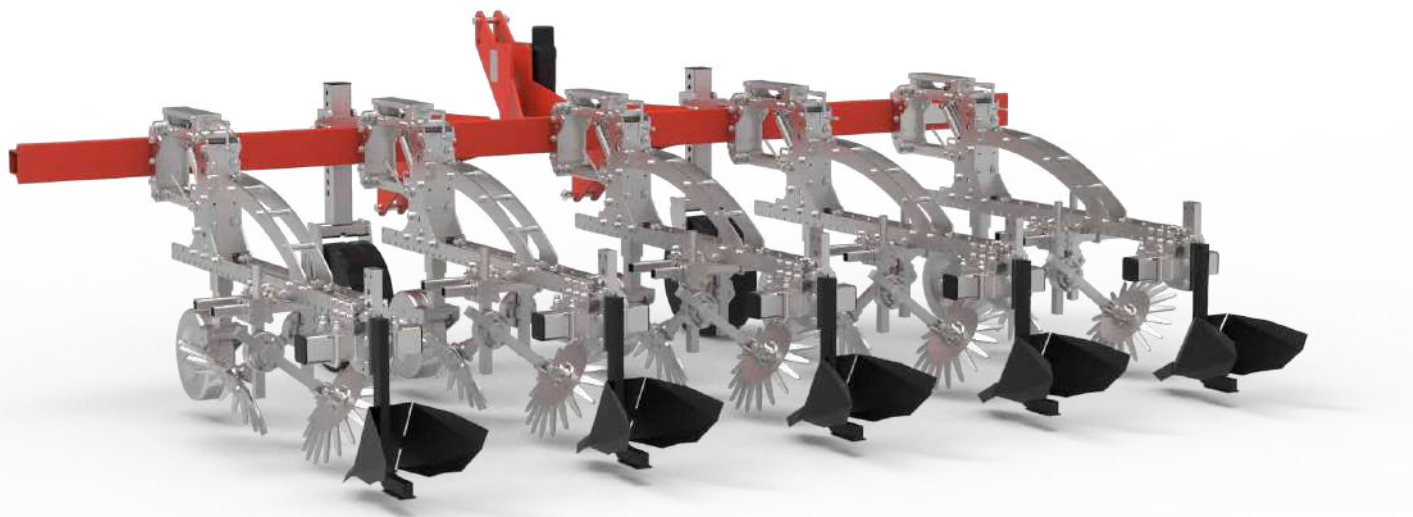

| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy/medium texture and stony (with small stones: about 2–3 cm in diameter) |
| INTER-ROW DISTANCE | 60-75 cm |
| INTER-PLANT DISTANCE | - |
| ROTOR DIMENSIONS | A unique ROTOCLEAN model with adjustable angle |
| WORKING SPEED | 2 - 5 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | Good |
| N. OF ROWS | Depending on the bed former being used |
| TYPE OF SYSTEM | Mechanical |
| USE | Intuitive and modular |


Rotoclean element

ROTOCLEAN ELEMENT
STANDARD
WORKING
IN THE FURROW



- ① **Dual-adjustment element:** for pressure on the ground with crank-operated variable-load parallelogram and for depth with wheel adjustment
- ② **Rotoclean Rotors:** steel, with straight star-shaped blades, variable inclination towards the side of the mound to work at a depth of 2 cm, dropping weed sprouts or the weeds themselves at the base of the furrow
- ③ **Other accessories such as the adjustable or fixed deflector**

Rotoclean 1 bed with a fixed frame, 2 Rotoclean elements and wheels with depth adjustment

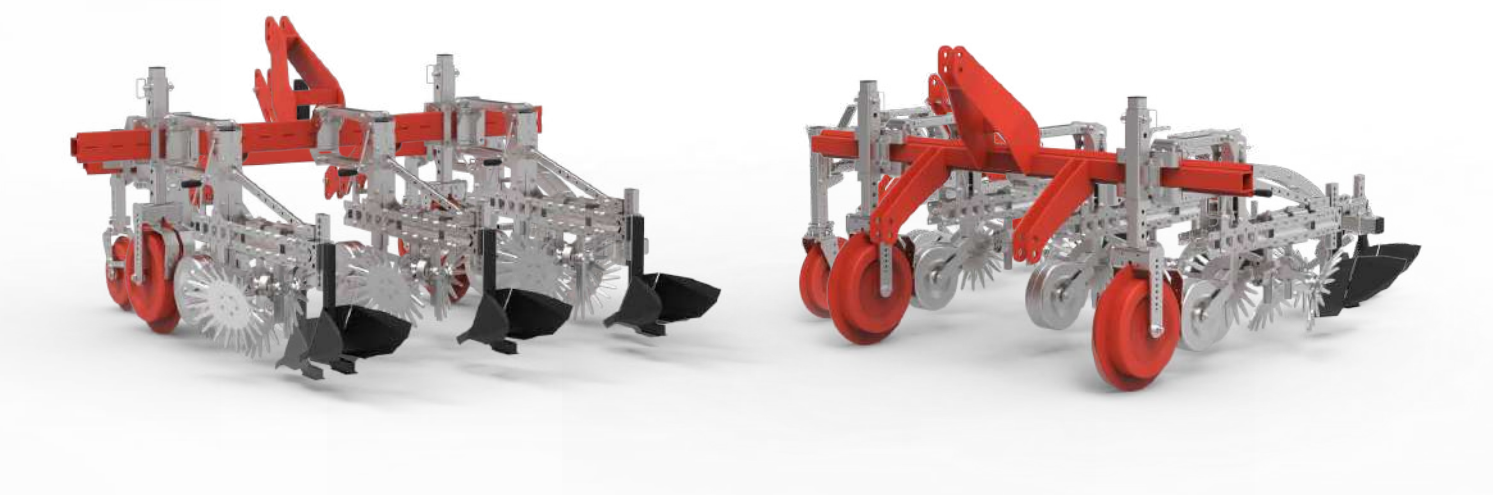

TECHNICAL CHARACTERISTICS


Rotoclean on the lift with a 3-point hitch, consisting of a simple fixed frame, with 2 or more inter-row elements, each equipped with a pair of Rotoclean rotors, adjustable deflectors; 02 support wheels with a diam. 400 mm with depth adjustment for crops on ridge, such as carrots and potatoes.

Rotodisk

ROTODISK weeding machine with fixed frame; modular with multiple inter-row parallelograms with support wheel to work at the base of the ridge.



ROTODISK modular frame with multiple Rotodisk elements mounted on a shifter with Rotoblizz.




| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy/medium texture and stony (with small stones: about 2–3 cm in diameter) |
| INTER-ROW DISTANCE | > 75 cm |
| INTER-PLANT DISTANCE | - |
| ROTOR DIMENSIONS | A unique ROTODISK model with adjustable angle, shift, and rotation |
| WORKING SPEED | 6 - 8 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | Good |
| N. OF ROWS | Depending on the bed former being used |
| TYPE OF SYSTEM | Mechanical |
| USE | Intuitive and modular |




Rotodisk element

ROTODISK ELEMENT
SINGLE

WORKING
BETWEEN ROWS

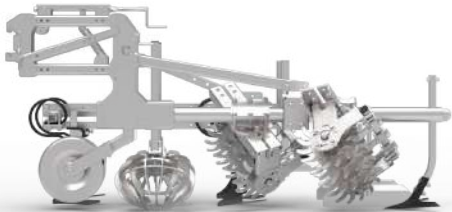

BODIES AND WORKING SCHEME

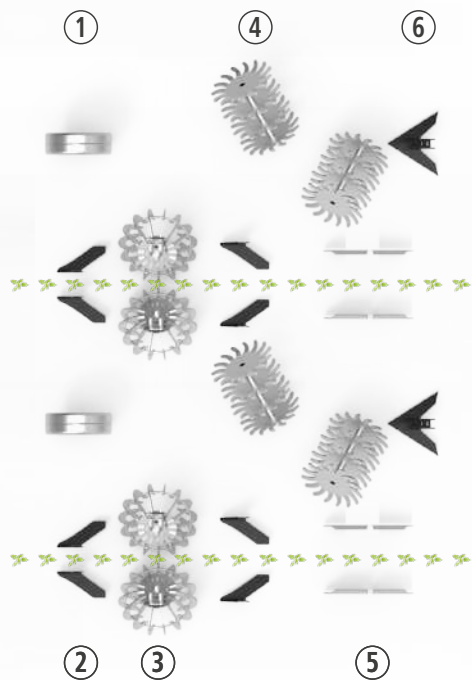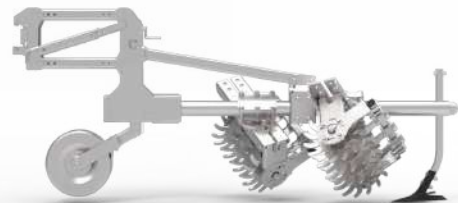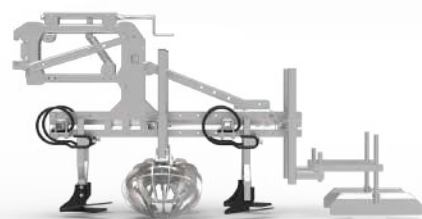

- ① **Dual-adjustment element:** for pressure on the ground with crank-operated variable-load parallelogram and for depth with wheel adjustment
- ② **Front side hoes:** to break up the soil and removing stones. Suitable for heavy soils
- ③ **Rotovert or Rotoblizz rotors**
- ④ **Rotodisk rotors:** steel, with straight star-shaped blades, variable inclination towards the side of the ridge to work at a depth of 2 cm, dropping weed sprouts or the weeds themselves
- ⑤ **Pair of ridgers:** to hearth the soil
- ⑥ **Fixed furrow**



TECHNICAL CHARACTERISTICS

Rotodisk on the lift with 3-point attachment consisting of a simple fixed frame with 3 or more inter-row elements, a pair of Rotodisk rotors each, and fixed deflectors; 2 support wheels diam. 400 mm with depth adjustment, for crops on ridge, such as potatoes and tobacco.

Colibrì

The COLIBRI weeding machine works right next to the sown row at a distance of 2 cm from the plant, with minimum inter-row distances of 4.5 cm for carrots and 6 cm for baby leaves, without damaging the leaf and root system and preventing weeds from germinating.

The active weeding system actuated by the motorized rotation of the discs means the COLIBRI gently breaks up the soil without causing the plant to shift. Both the speed and configuration of the discs can be adjusted and requested depending on the plant growth stage and type of soil.

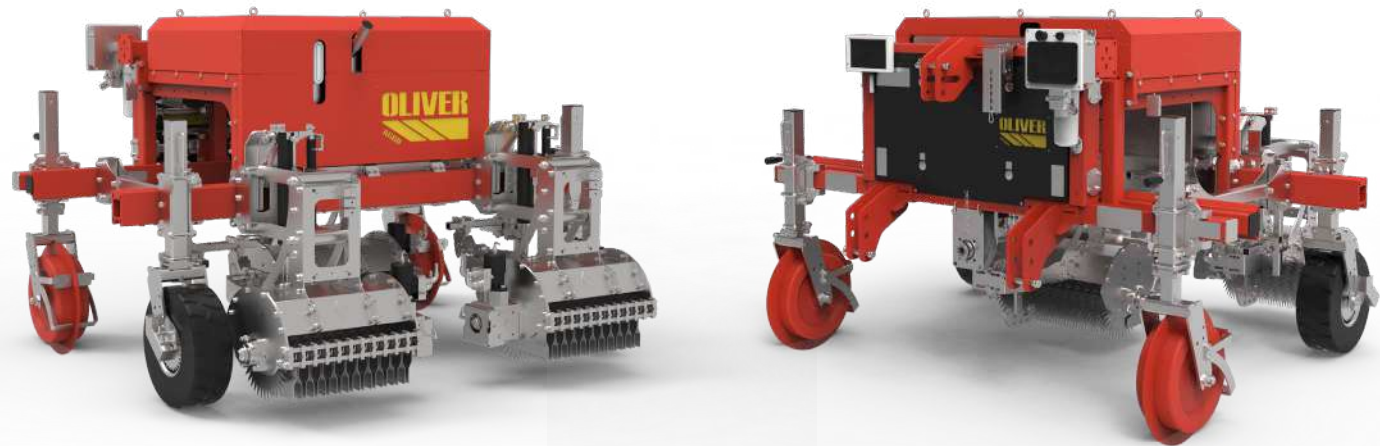


| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy, medium texture, without stones/rocks |
| INTER-ROW DISTANCE | CARROTS: Min. 4.5 cm FOURTH RANGE or FRESH-CUT products: 5 cm |
| ROTOR DIMENSIONS | Standard disc dimension Ø 320 mm |
| WORKING SPEED | 1,5 - 3,5 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | Stone burier, bed former with smooth levelling roller, use of RTK GPS for soil preparation, sowing, and weeding. |
| SOWING/TRANSPLANTING | Centred on the mound |
| NO. OF ROWS | Depending on the seed drill in use, on one mound at a time |
| TYPE OF SYSTEM | Automatic |
| USE | Some attention to camera settings and depth sensors |

Colibrì element


Each COLIBRI element consists of a covered parallelogram with a series of COLIBRI discs (configured according to customer specifications) with cleaners, hydraulically POWERED by an orbital motor with an angular gearbox. At the front, it is equipped with a sensor probe with an angular sensor for self-levelling. The elements are moved up or down by a hydraulic piston electrically controlled by a linear potentiometer to relay the actual working depth. Each disc has a diameter of 320 mm, with a 3-mm thickness. The useful working surface of each disc is 24 mm.

COLIBRI ELEMENT
STANDARD
WORKING
ON THE ROWS

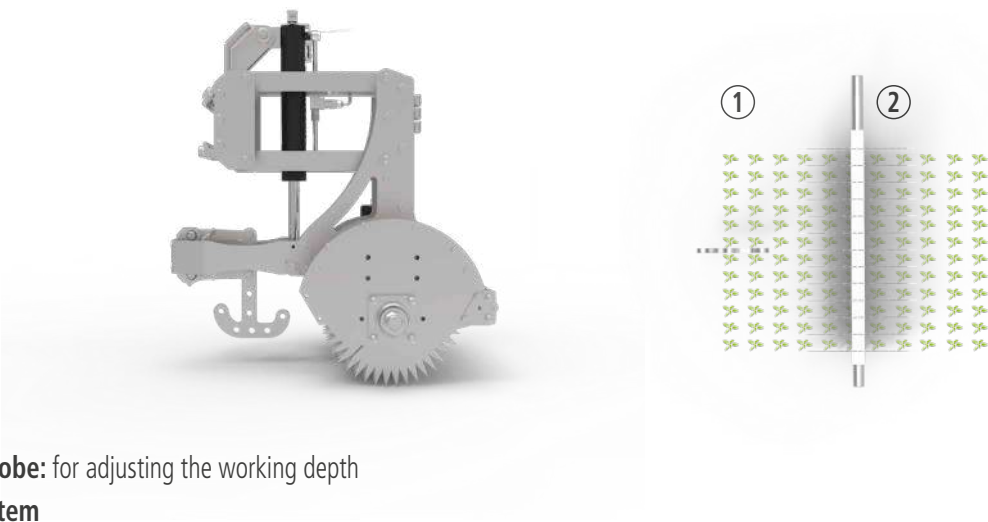

- 1 Level sensor probe: for adjusting the working depth
- 2 Colibri discs system


COLIBRI ELEMENT
TILTING
WORKING
ON THE ROWS

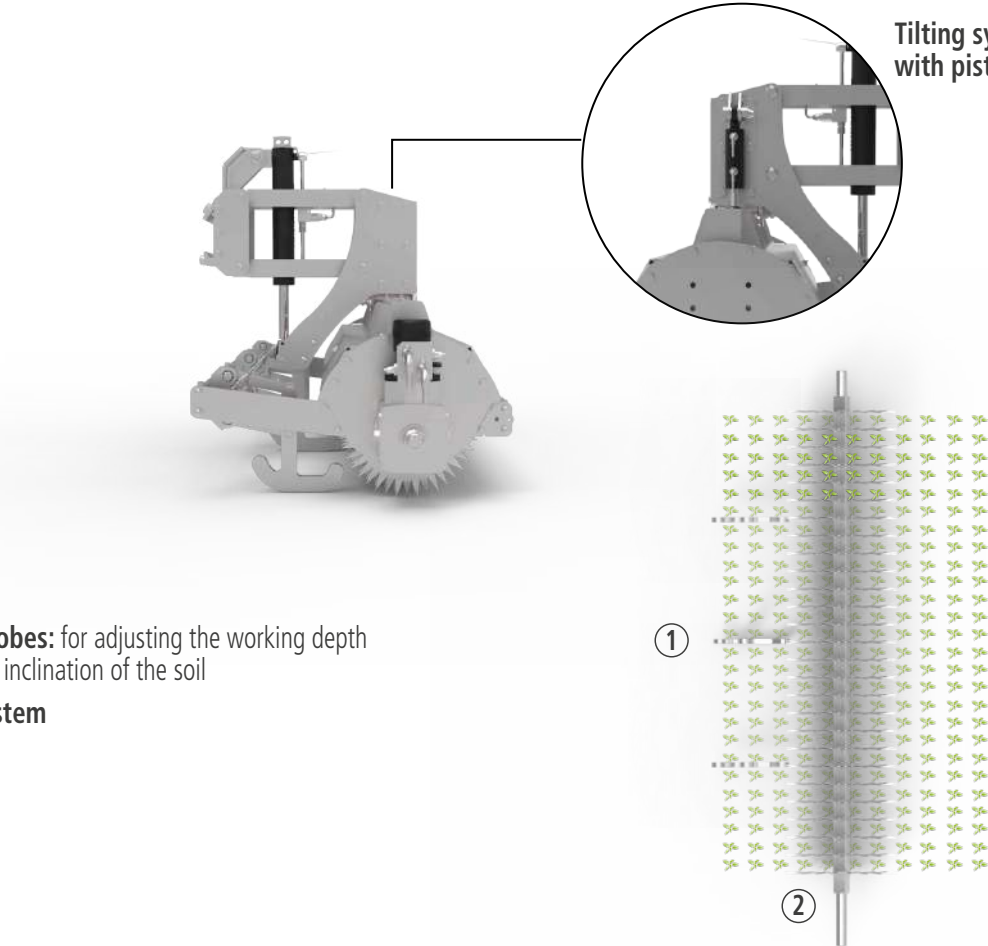


- 1 Level sensor probes: for adjusting the working depth and detecting the inclination of the soil
- 2 Colibri discs system

Some **Colibrì** configurations


1 bed, 3 double rows

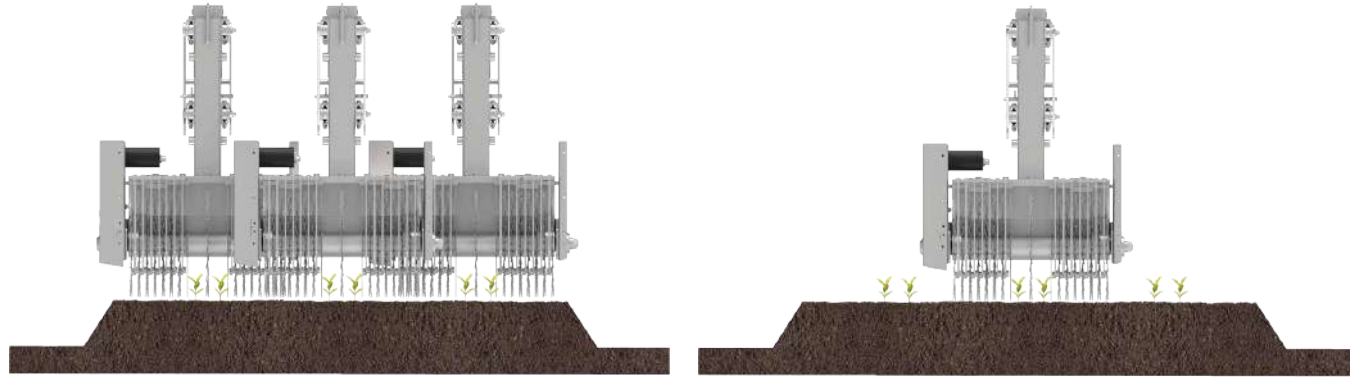



1 bed, 4 double rows

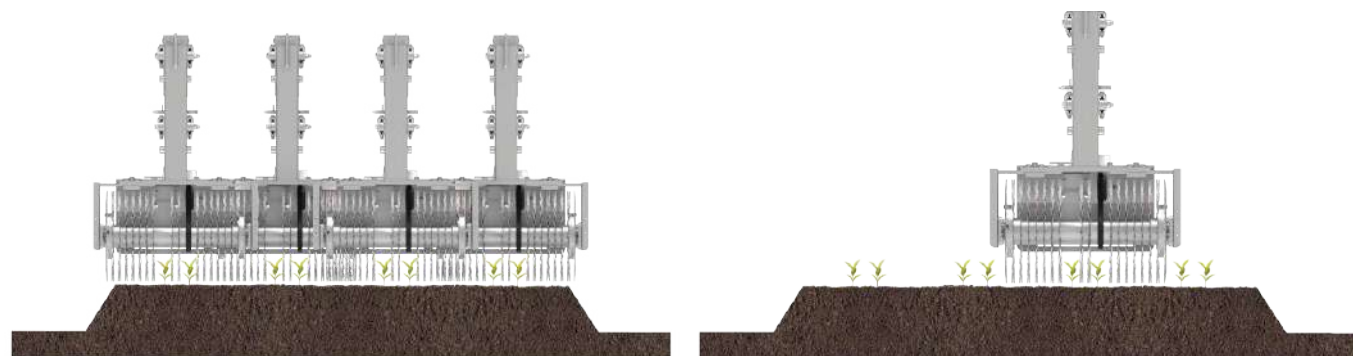


1 bed, 3 triple rows

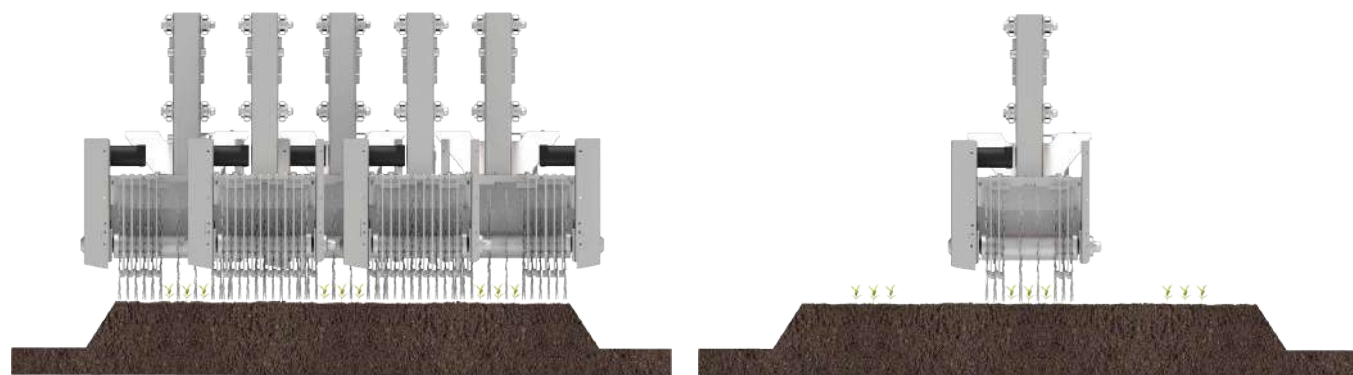

1 bed, multiple rows ≥ 6 cm

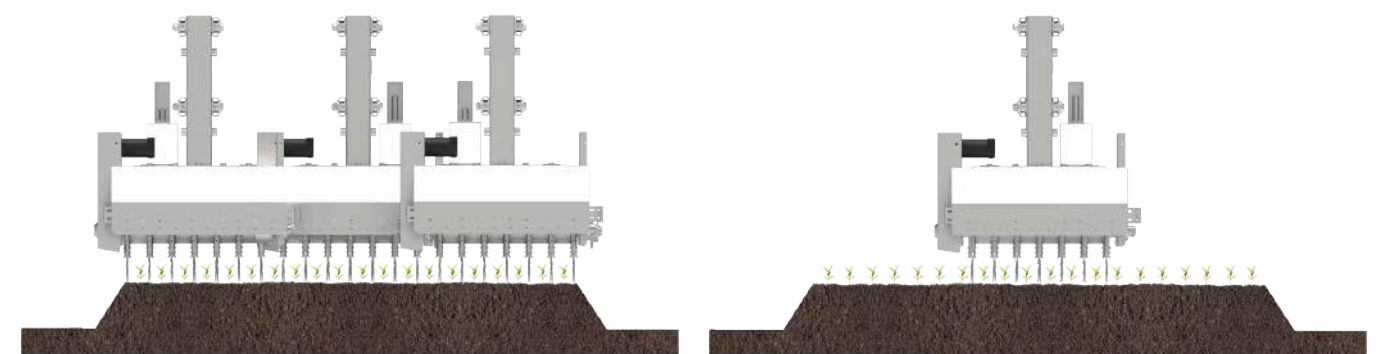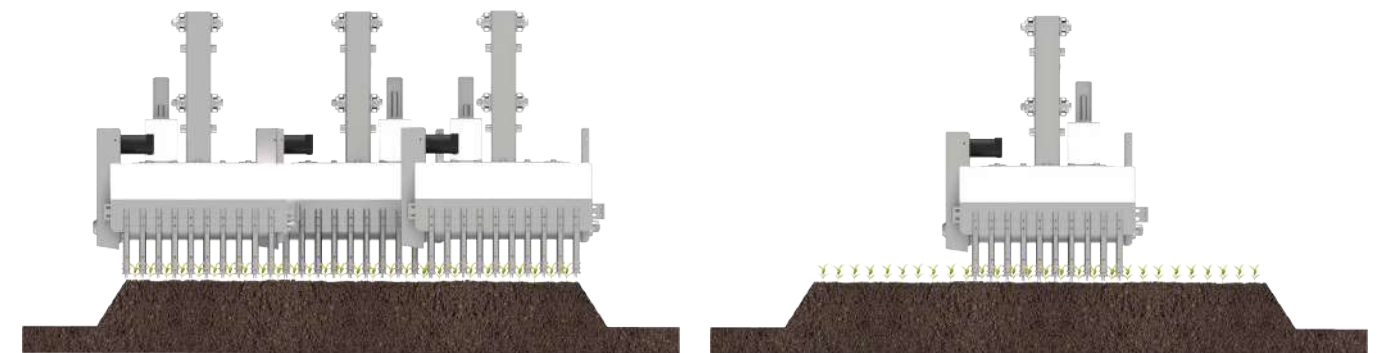

1 bed, single row ≥ 3

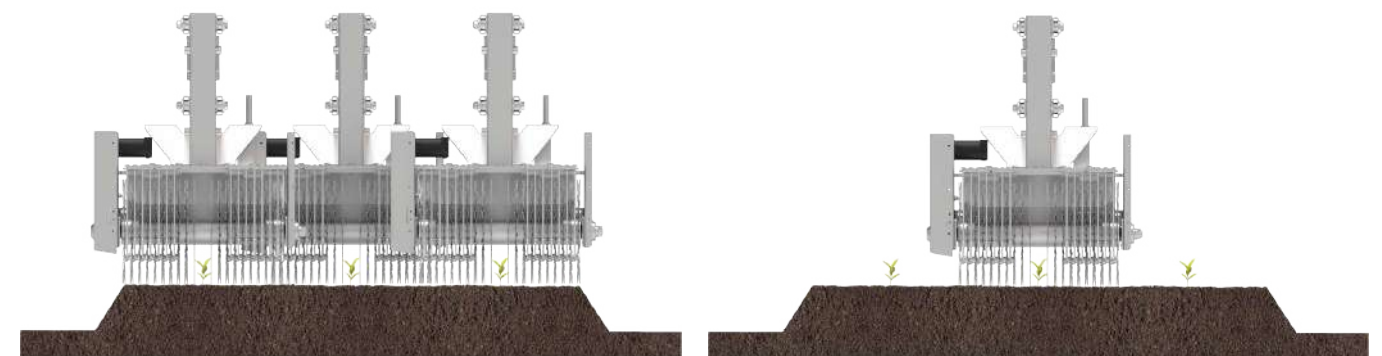

Colibrì on ridges NEW

The “COLIBRÌ ON RIDGES” weeding machine works right next to the sown row at a distance of 2 cm from the plant, with minimum inter-row distances of 4,5 cm for carrots and onions on ridges without damaging the root and leaf system, preventing the germination of weeds.




| | |
|-------------------------------------|---|
| TYPE OF SOIL | Sandy, medium texture, without stones/rocks |
| INTER-ROW DISTANCE | CARROTS and ONIONS: Minimum 4,5 cm |
| ROTOR DIMENSIONS | Standard disc dimension Ø 320 mm |
| WORKING SPEED | 1,5 - 3,5 Km/h |
| REQUIRED PREPARATION OF THE TERRAIN | Stone burier, bed former with smooth levelling roller, use of RTK GPS for soil preparation, sowing, and weeding |
| SOWING/TRANSPLANTING | Centred on the ridge |
| N. OF ROWS | Depending on the seed drill in use, even on multiple ridges |
| TYPE OF SYSTEM | Automatic |
| USE | Some attention to camera settings and depth sensors |

Colibrì on ridges element

Each COLIBRÌ ON RIDGES element consists of a covered parallelogram with a series of COLIBRÌ discs (configured according to customer specifications) with cleaners, hydraulically POWERED by an orbital motor with an angular gearbox. At the front, it is equipped with a sensor probe with an angular sensor for self-levelling. The elements are moved up or down by a hydraulic piston electrically controlled by a linear potentiometer to relay the actual working depth. Each disc has a diameter of 320 mm, with a 3-mm thickness. The useful working surface of each disc is 24 mm.


COLIBRÌ ELEMENT
ON RIDGES
WORKING
ON THE ROWS

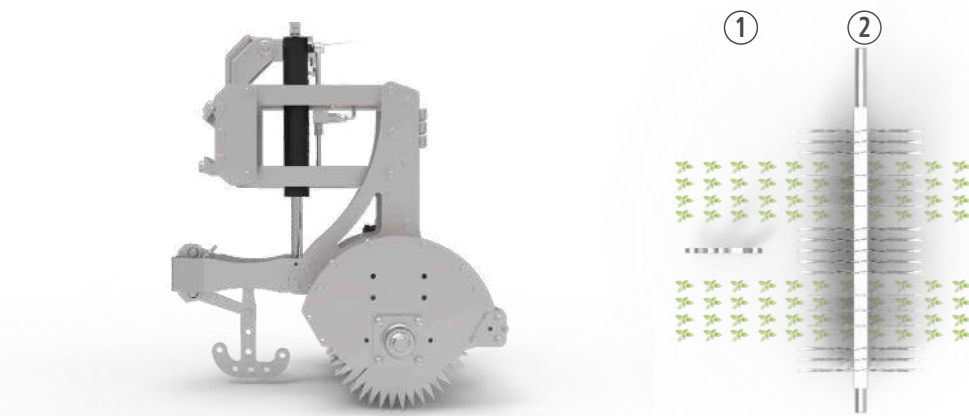


- ① Level sensor probe: for adjusting the working depth
- ② Colibrì discs system

Some Colibrì on ridges configurations

4 ridges, 4 double rows

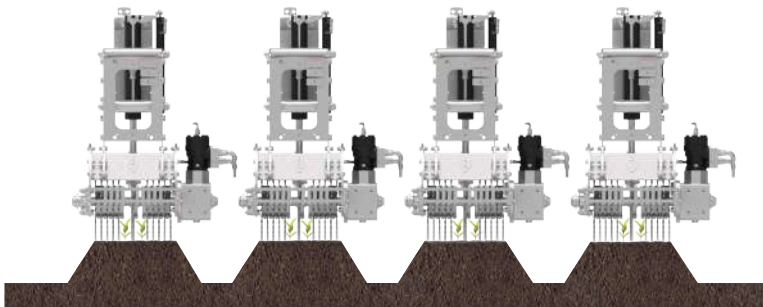


3 ridges, 3 double rows 2 ridges, 2 double rows

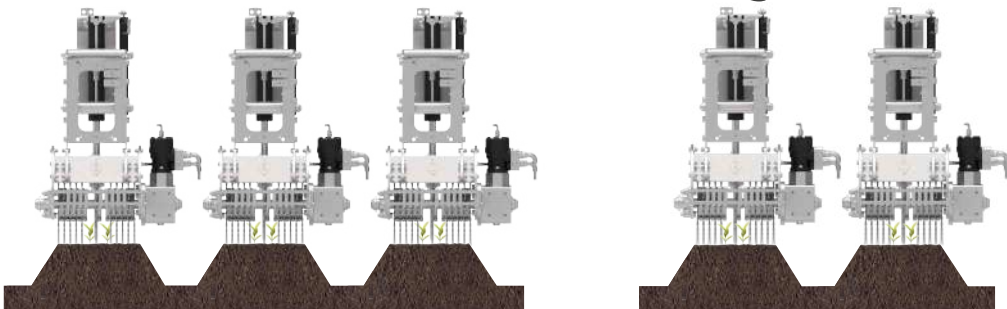

Rotobrush

The “ROTOBRUSH” weeding machine is a simplified version of the Colibrì weeding machine that utilizes a brush system element instead of discs. It works right next to the sown row at a distance of 2 cm from the plant, with minimum inter-row distances of 15 cm on crops sown on ridges and beds, without damaging the root and leaf system, preventing the germination of weeds, and can be used for false seeding and in stony soils.

The active weeding system actuated by the motorized rotation of the brushes means the ROTOBRUSH gently breaks up the soil without causing the plant to shift. Both the speed and configuration of the discs can be adjusted and requested depending on the plant growth stage and type of soil.



| | |
|-------------------------------------|---|
| TYPE OF SOIL | Sandy, medium texture, with some stones |
| INTER-ROW DISTANCE | Minimum 15 cm |
| WORKING SPEED | 1,5 - 3,5 Km/h |
| REQUIRED PREPARATION OF THE TERRAIN | Bed former with smooth levelling roller, use of RTK GPS for soil preparation, sowing, and weeding |
| SOWING/TRANSPLANTING | Centred on the bed and on the ridge |
| N. OF ROWS | It depends on the seed drill in use, whether on one bed at a time or on multiple ridges |
| TYPE OF SYSTEM | Hydraulic |
| USE | Intuitive and modular |

Colibrì

Machine specifications

OPERATION

The COLIBRÌ precision inter-row weeding machine is designed to work between rows of only 4.5 cm for carrots and 5 cm for baby leaves. The machine is designed for use as early as the cotyledon stage of the crop, ensuring unparalleled cleanliness between the rows. The hydraulic system is already prepared for both gear pumps and direct connection to the tractor via a variable displacement pump and/or with load sensing. The COLIBRÌ hydraulic system is designed for smoother work and linear, precision weeding. It consists of a proportional single-block distributor used to both rotate the discs and maintain a constant depth (self-levelling).

TECHNICAL FEATURES

Towed COLIBRÌ weeding machine with 2.40-m double-bar hydraulic shifting frame resting on 4 wheels with manual levelling, 2 fixed wheels with crest and 2 rear pivoting rubber wheels. Each COLIBRÌ element consists of a covered parallelogram with a series of steel COLIBRÌ discs. The discs are MOTORIZED and have a sensor on the front to detect the angle for self-levelling. The disks rotate at a speed 1.5 times higher than the tractor speed to allow for better and more effective mechanical weeding.




Figure 1 – Colibri disc package



Figure 2 – Unworked vs. worked with Colibri

INNOVATIVE TECHNICAL ASPECTS

The proportional hydraulic system controlled by an angular sensor and linear potentiometer on the element (PLC) allows for a constant working depth with variations of ± 3 mm in the soil profile to avoid interfering with the seedling root system. Adjusting the disc depending on the soil variables optimizes the tilling in sandy or medium-textured soils.

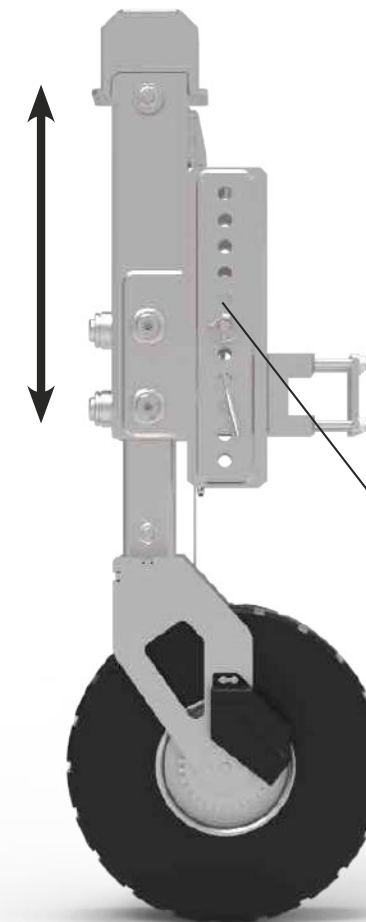

SELF-LEVELLING WHEELS



Equipped laterally with a sensor probe with an angular sensor for self-levelling. They are adjusted in height via a cylinder controlled electro-hydraulically by a linear potentiometer to determine the actual working depth. The sensor probe is positioned directly at the top of the ridge, sending a signal to the control unit to correct any irregularities in the terrain. This system automatically compensates for discrepancies between the tractor's track and the ridge surface, ensuring precise and uniform work even on uneven ground.

Piston system

Optyma 2.0

OPTYMA 2.0 is our automatic weeding machine, an inter-row and inter-plant hoe with distances greater than 21 cm between the rows.

The OPTYMA 2.0 precision inter-row weeding machine is designed to work specifically on head and leaf vegetables with a minimum inter-row spacing of 21 cm and an inter-plant distance of 12.5/15 cm. It is designed mainly for work at an early stage of growth to prevent weed infestation. The machine is design for use starting 7-10 days after transplanting the crop, total cleanliness, even between the plants.

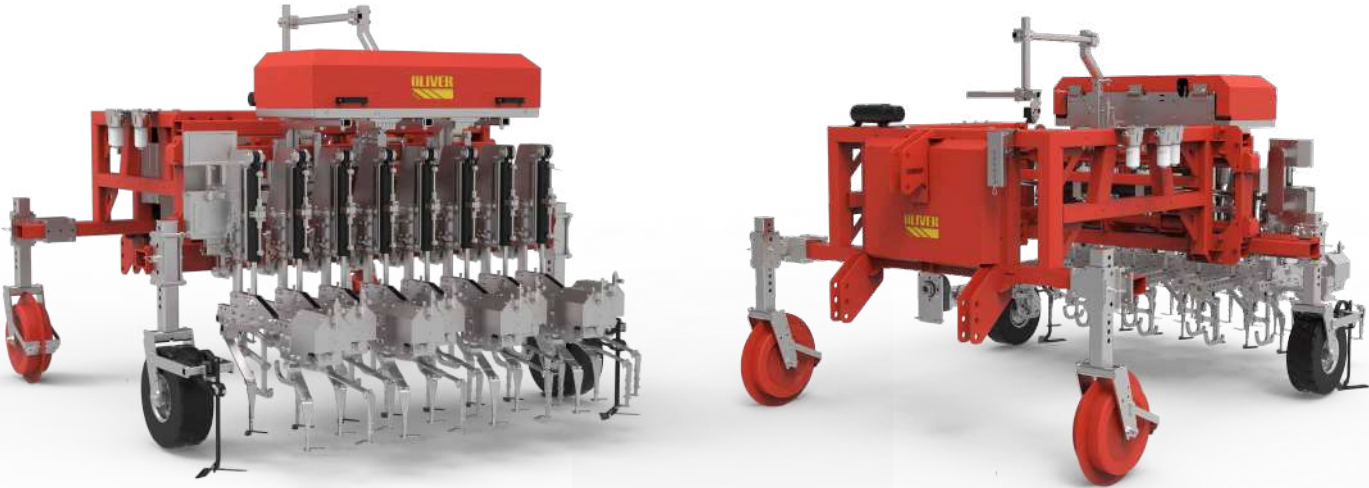

| | |
|-------------------------------------|--|
| TYPE OF SOIL | Sandy, medium texture, without stones/rocks |
| INTER-ROW DISTANCE | Minimum 12,5/15 cm |
| ROTOR DIMENSIONS | Minimum 15 cm |
| WORKING SPEED | 1,2 - 1,5 Km/hr |
| REQUIRED PREPARATION OF THE TERRAIN | The ground must be levelled and free of stones (Stone burier, bed former with smooth levelling roller) |
| NO. OF ROWS | Depending on the transplanter/seed drill in use, also on multiple ridge |
| TYPE OF SYSTEM | Automatic |
| USE | Some attention to camera settings |

Optyma 2.0 element

Each OPTYMA 2.0 element consists of a linear vertical upright activated by a hydraulic cylinder controlled via a linear potentiometer with a +/- 150-mm stroke, a longitudinal strut with several slots for different tools. The element is equipped with a front-mounted probe with an angular sensor for self-levelling, and at the rear there is the hydraulic mechanism for opening and closing the blades between the plants.

The blades work perpendicular to the tractor path and are electrically controlled by the T&H plant recognition system, which activates the opening and closing mechanism. The opening and closing speed and force can be managed at will and depending on the soil consistency using the flow regulator on each element, creating the right compromise between speed and tilling, while keeping the plants clean.

OPTYMA 2.0 ELEMENT STANDARD


WORKING IN THE INTER-PLANT
Minimum inter-row distance: 21 cm



- ① **Level sensor probe:** for adjusting the working depth
- ② **Front hoes:** to facilitate and complement the action of the automatic blades
- ③ **Automatic hoes system:** for a precision inter-row weeding

OPTYMA 2.0 ELEMENT DOUBLE ACTING

WORKING IN THE INTER-PLANT
Inter-row distance: from 18 cm to 21 cm

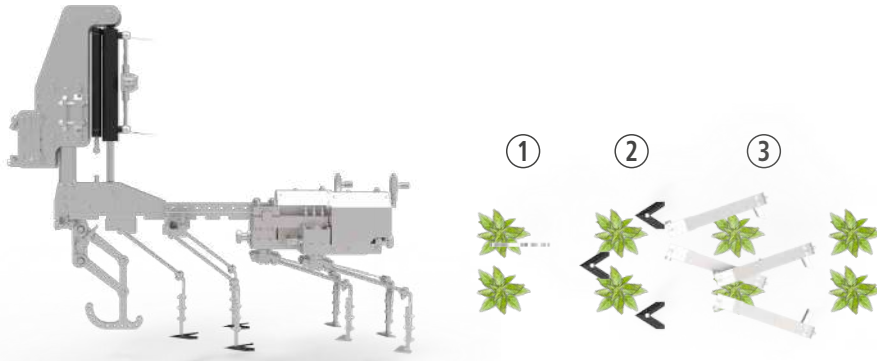

- ① **Level sensor probe:** for adjusting the working depth
- ② **Front hoes:** to facilitate and complement the action of the automatic blades
- ③ **Automatic double-acting hoes system:** for a precision inter-row weeding

Optyma 2.0

Machine specifications



INNOVATIVE TECHNICAL ASPECTS

The OPTYMA 2.0 hoeing tool actively weeds and works the soil between the plants at a depth of 2–3 cm.

The mechanism activates two synchronized blades that close between the plants, cutting and moving the soil while removing weeds and preventing them from germinating. The space between the rows is worked using specific flat, sharpened hoes placed on the front of the hoeing tool to facilitate and complete the action of the blades.

Weeding or hoeing with OPTYMA 2.0 can be done at various stages of crop development, working 90% of the area close to the plant. Weeding not only fights weeds; it increases aeration of the plant's root system, resulting in a more vigorous crop in less time. The proportional hydraulic system allows for smooth work during weeding. It is controlled by an angular sensor and linear potentiometer on the element (PLC) allows for a constant working depth with variations of ± 3 mm in the soil profile to avoid interfering with the root system of the seedling.

ELECTRICAL SYSTEM

The electrical system consists of a specific PLC control unit for mobile machines with a push-button display and 7" dedicated touch screen, with the possibility of connecting cameras to the 12-V display (SEE PAGE 16).



Differences from competitors

We work with parallelograms straddling the cultivated row to a span of 50–60 cm from the surface, keeping the **element stable** even without a support wheel and guaranteeing the **highest precision and support** close to the plant.

We have developed **steel tools with sealed bearings**, materials that allow even clay soil to be worked while guaranteeing **aeration, mechanical weeding, and long-lasting effects**.

Flexibility in the element being pushed or pulled.

Modularity in the **configuration**.



AGRICULTURAL **TECHNOLOGY**
FOR **CONSCIOUS NUTRITION**

OLIVER AGRO SRL

Via Torre, 350
37056 ENGAZZÀ DI SALIZZOLE
(VERONA) - ITALY
Tel. +39 045 6954392 - Fax. +39 045 6954 408
Whatsapp +39 348 2418421

<https://www.facebook.com/oliveragrosrl>
https://www.instagram.com/oliver_agro/
<https://www.youtube.com/user/dittaoliver1>

info@oliveragro.com
www.oliveragro.com



V.2.24